


HD 2200 Series

HD2200/2200M | HD2200C/2200MC

HYUNDAI WIA Heavy Duty Cutting CNC Turning Center

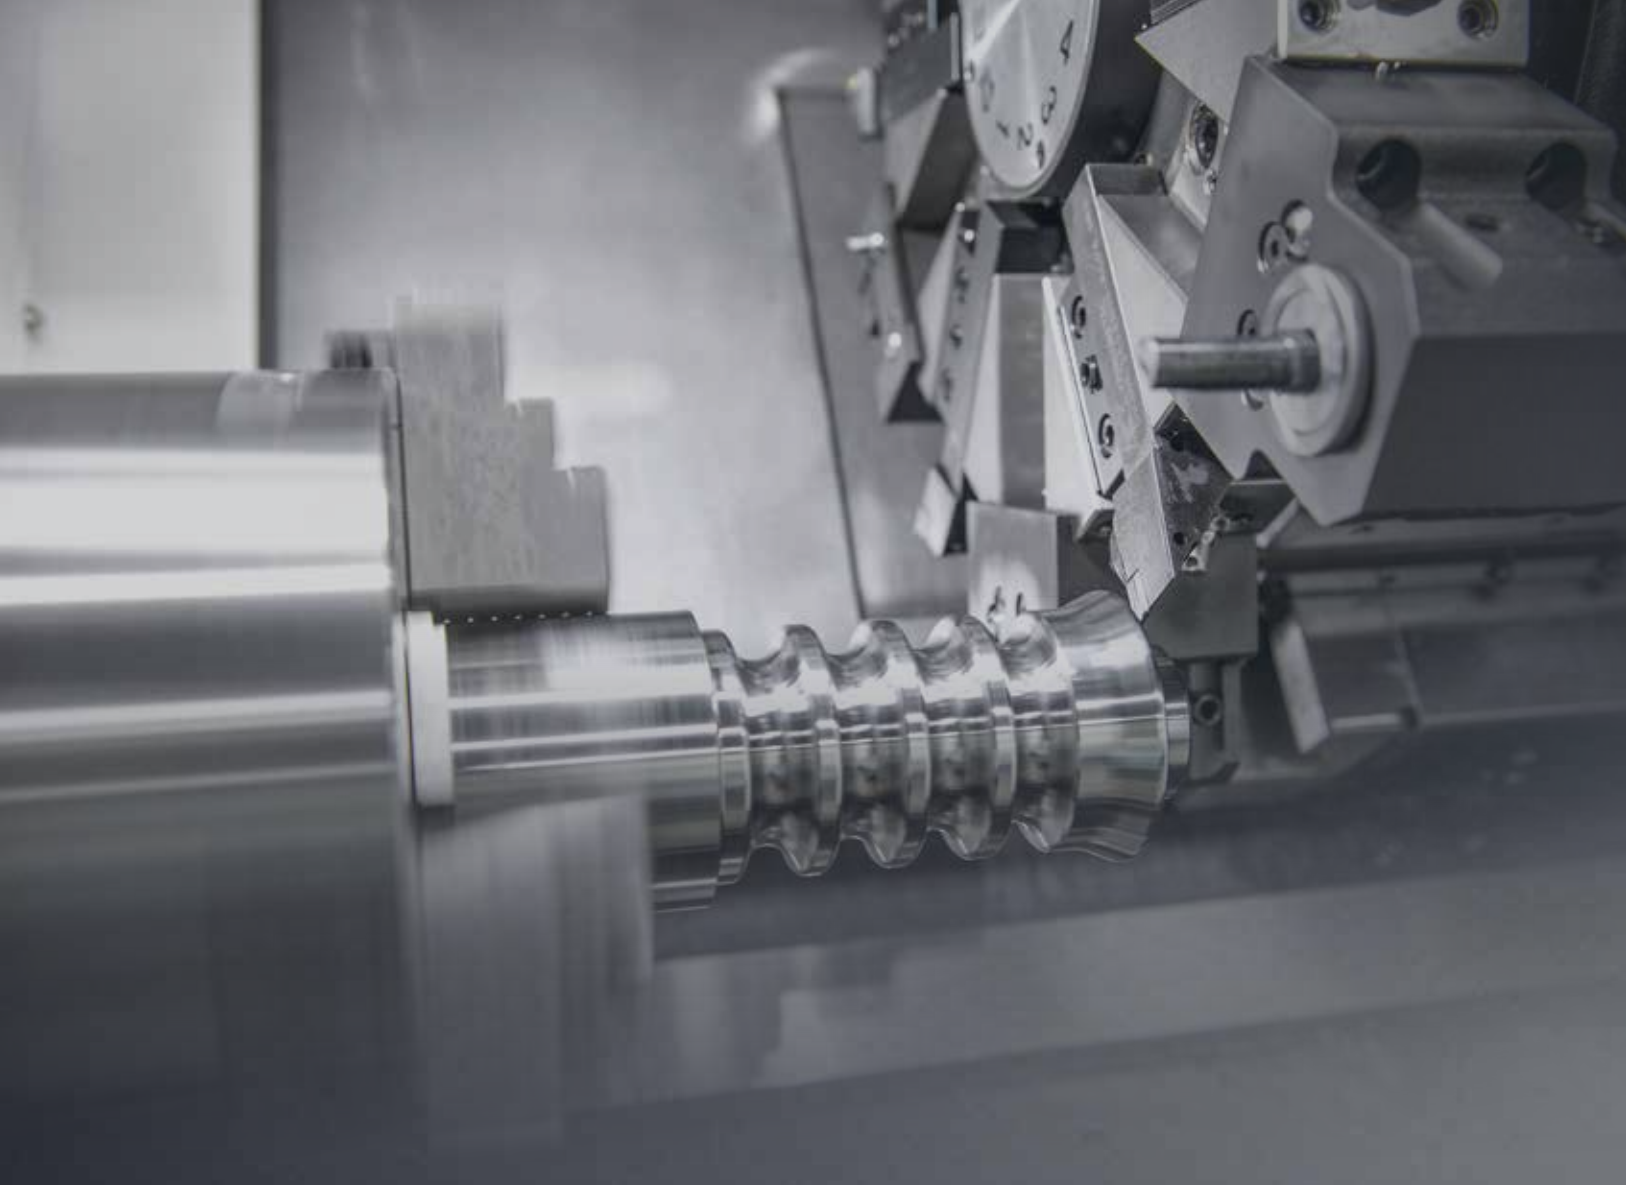

Technical Leader

The CNC Turning Center HD2200 Series, designed by Hyundai WIA with years of expertise and the latest technology, is a Turning Center that maximizes productivity and performance.

		HD2200 HD2200C	HD2200M HD2200MC
Max. Swing	mm(in)	Ø550 (21.7")	Ø550 (21.7")
Max. Turning Length	mm(in)	565 (22.2") 550 (21.7")	467 (18.4") 452 (17.8")
Chuck Size	inch	8" 10"	8" 10"
Bar Capacity	mm(in)	Ø65 (2.6") Ø81 (3.2")	Ø65 (2.6") Ø81 (3.2")
Spindle Speed (rpm)	r/min	4,500 [4,000] [4,000] 3,500 [3,500]	4,500 [4,000] [4,000] 3,500 [3,500]
Spindle Motor (Max.)	kW(HP)	18.5 (24.8) [18.5 (24.8)] [23.5 (31.5)] 18.5 (24.8) [26.4 (35.4)]	18.5 (24.8) [18.5 (24.8)] [23.5 (31.5)] 18.5 (24.8) [26.4 (35.4)]
Travel (X/Z)	mm(in)	215/580 (8.5"/22.8")	215/482 (8.5"/19.1")
No. of Tools	EA	12	12

[Option] ■ : iTROL

HD

2200 Series

Lathe with Box Guideways for Heavy Cutting

- Box guideways for heavy duty cutting
- 45° slanted one-piece bed structure for high rigidity
- Stabilized Unit Structure to minimize thermal displacement
- User convenient structure for high productivity
- Excellent rapid traverse rate: 30m/min [1,181ipm] (Z-axis)
- Reliable, high speed servo turret: 0.12sec/step
- Ergonomic design for convenient access to chuck and tool



01 BASIC STRUCTURE

Which Can Cover All Machining Process with Only One Initial Setting

Mill Turret ('M' Type)


- BMT55P (12 Station)
- 6,000 r/min
- Collet Size : $\varnothing 16$ ($\varnothing 5/8$ ") {ER25}

Tail Stock

- MT#4 [MT#5]
- Quill Dia. : $\varnothing 65$ (2.6")
[Opt. $\varnothing 100$ (3.9")]

High Precision Spindle

- Integral body & heat dissipating RIB structure.
- HD2200/2200M : 8"
- HD2200C/2200MC : 10"
- C-Axis Control : 0.001° ('M' Type)

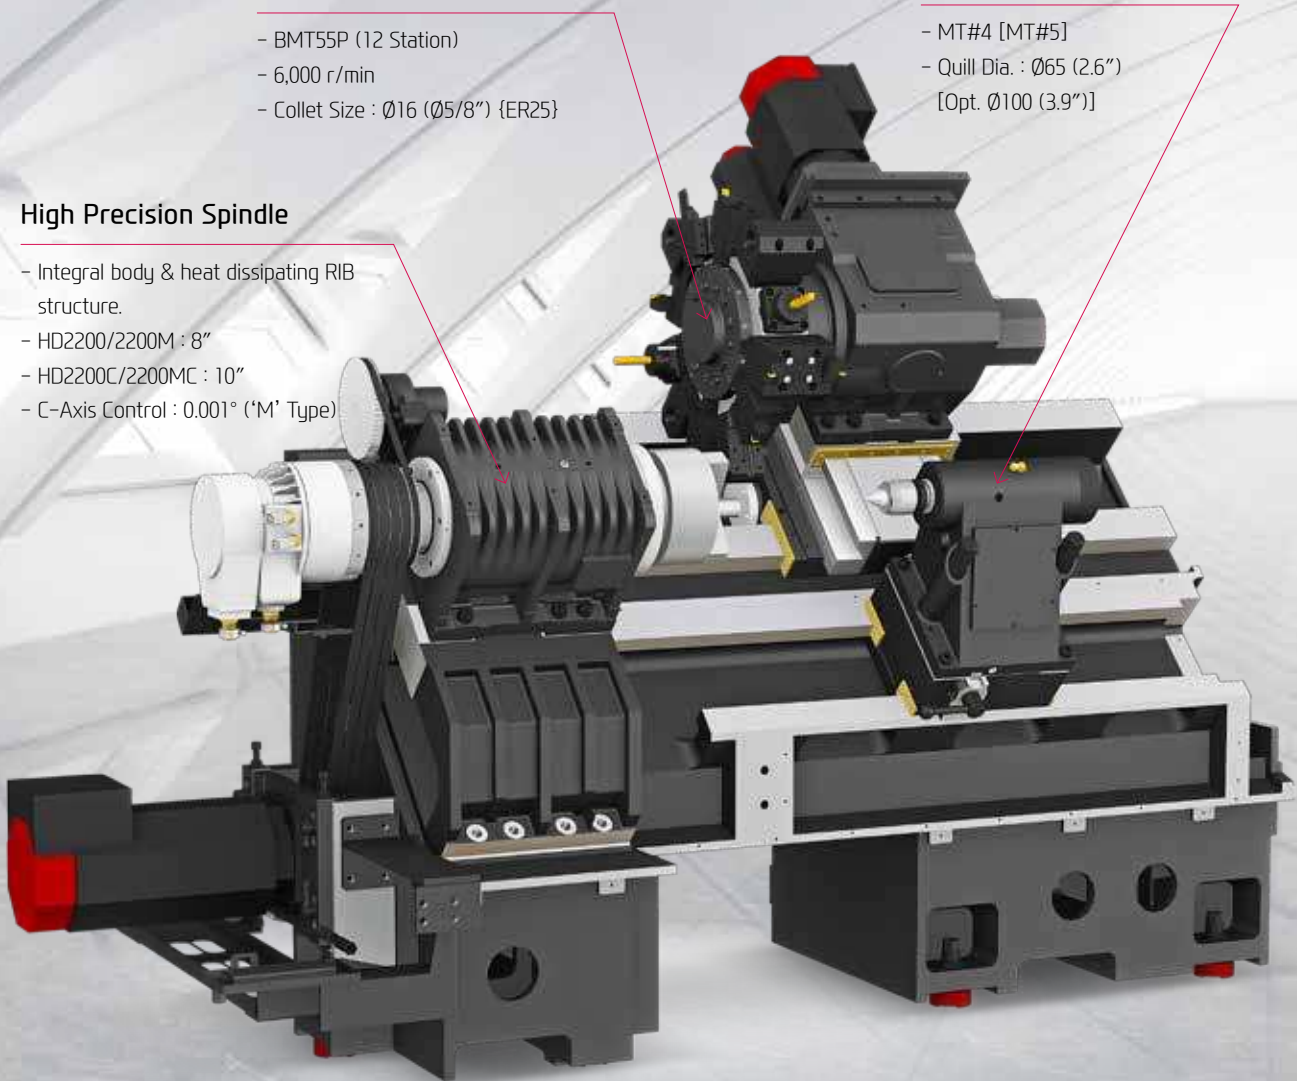

POWERFUL CUTTING CAPABILITY & WIDE CUTTING AREA

ALL-IN-ONE TYPE OF BED

High Rigidity, One-Piece Structure

The bed structure of the HD2200 is designed with combination of square type and tubular rib structure. It has a slope of 45 ° which helps maintain high rigidity. It shows great performance in heavy duty cutting, absorbing vibration and maintaining accuracy.

Integrated Coolant Tank

The coolant tank is installed at the front of the bed to prevent leakage, enabling stable machining with the use of high pressure coolant.



GUIDEWAY

Box Guideway

All axes of HD2200 are designed with Box Guideways for better travel ability. Box Guideways show great performance in offsetting vibrations caused by heavy duty cutting.

Sealed GIB Structure

X-axis of HD2200 is designed to minimize the damage of turcite from chips by applying the sealed GIB structure.

Z-Axis High Performance Motor

Z-axis feed ability is improved by installing high performance servo motor.

(Z-axis Rapid Traverse Rate : 30 m/min [1,181 ipm])



Rapid Traverse Rate (X/Z)	HD2200/C Travel (X/Z)	HD2200M/MC Travel (X/Z)
24/30 m/min (945/1,181 ipm)	215/580 mm (8.5"/22.8")	215/482 mm (8.5"/19")

02 HIGH PRECISION SPINDLE

Long Lasting, High Accuracy & Excellent Performance CNC Turning Center

Spindle Specifications

[] : Option

ITEM	Spindle Speed	Motor (Max./Cont.)	Torque (Max./Cont.)	Controller
HD2200/M	4,500 rpm	18.5/15 kW (25/20 HP)	206/125.3 N·m (151.9/92.4 lbf·ft)	FANUC
	[4,000 rpm (High-torque)]	18.5/15 kW (25/20 HP)	353.2/214.8 N·m (260.5/158.4 lbf·ft)	
HD2200C/MC	[4,000 rpm]	23.5/15 kW (31.5/20 HP)	224.9/143.2 N·m (166/105.6 lbf·ft)	iTROL
	3,500 rpm	18.5/15 kW (25/20 HP)	403.6/245.4 N·m (297.7/181 lbf·ft)	FANUC
	[3,500 rpm]	26.4/22 kW (35.4/30 HP)	428.4/357 N·m (314/263.3 lbf·ft)	iTROL

HEAVY DUTY CUTTING & HIGH ACCURACY

SPINDLE

Spindle for Heavy Cutting


The main spindle is designed with the same structure as that often found in larger sized machines. The combination of double cylindrical roller bearings and angular contact ball bearings leads to excellent heavy duty cutting performance.

Ribstar Belt

Also, machining performance is enhanced by applying ribstar belt to minimize noise and belt slipping problems. The spindle is designed with a labyrinth structure to minimize possible bearing damage from coolant and to improve machining stability.

C-Axis Control ('M' Type)

C-axis of HD2200 Series can be controlled to 0.001° which makes it possible to process various shapes.

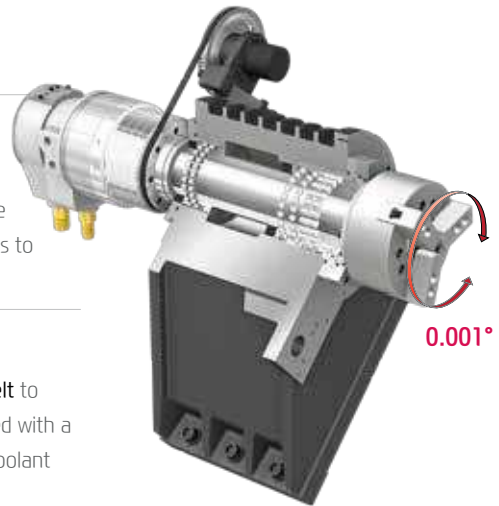

TAIL STOCK

[] : Option

MT#4 Tail Stock

Tailstock enables stable machining of high quality products where quill travels up to 80mm (3"). (MT#5 Tail Stock : Option)

- ◎ Quill Dia. : **Ø65** (2.6") [MT#5 : Ø100 (3.9")]
- ◎ Quill Travel : **80** mm (3") [MT#5 : Ø120 (4.7")]
- ◎ Tail Stock Travel : **513.7** mm (20.2")



03 SERVO TURRET

High speed, High Accuracy, Highly Reliable Servo Turret

Servo Turret

No. of Tools

12^{EA}

Tool Size (O.D./I.D)

□ 25/Ø40 mm (□ 1"/Ø1.125")

Indexing Time

0.12 sec

Mill Turret

ITEM	Speed	Motor (Max./Cont)	Torque (Max./Cont)	Collet Size
BMT55P (FANUC)	6,000 rpm	5.5/3.7 kW (7.5/5 HP)	52.5/26.5 N·m (38.7/19.5 lbf·ft)	Ø16 (0.6")/ER25
BMT55P (iTROL)	6,000 rpm	5.3/2.8 kW (7.1/3.8 HP)	51/26.8 N·m (37.6/19.8 lbf·ft)	

VARIOUS DRIVEN PRECISION BMT TOOL HOLDERS

SERVO TURRET



HD2200/C Servo Turret

The turret of HD2200 is applied with high performance AC servo motor, improving machining reliability. 3-piece coupling shows excellent performance in indexing. Powerful hydraulic tool clamping minimizes tool tip deviation caused by load.

Holder

To enhance rigidity, M10 bolts are used to fix holders and M12 bolts are used to fix boring bar holders.

20 Bar(290 psi) High Pressure Coolant **OPTION**

Turret is designed to utilize 20 bar (290 psi) high pressure coolant and it shows optimum performance in machining difficult-to-cut material.



MILL TURRET

HD2200M/MC BMT55P Turret (Mill Turret)

The BMT turret secures the tool with four bolts and key on the tool mounting surface of the turret, making it possible to powerfully fix the tool, ensuring high reliability in rigidity and precision.



STRAIGHT MILLING HEAD



ANGULAR MILLING HEAD



Mill Tool Holder

Machining capability has increased with the addition of straight milling head tool holder, which can machine workpieces from the side, and angular milling head tool holder, which can perform I.D. operations.



Special Tool

OPTION

The HD2200 series can process high value-added products using a variety of rotating tools. In particular, there is a multi-holder for attaching a variety of tools to one holder, and an eccentric rotary tool for handling eccentric parts without additional axis travel, which can realize integration of process with one machine.

❖ Consultation needed when ordering these options.

04 USER CONVENIENCE

Various Devices for User Friendly

BAR FEEDER SYSTEM

Bar Feeder

Bar feeder system enables automation which leads to efficiency improvement.

Long Type	: 3 m (118.1")	Short Type	: 1.5 m (59.1")
Bar Capacity	: Ø42 (1.7")	Bar Capacity	: Ø65 (2.6")



Parts Catcher

An optional parts catcher collects finished parts without the need to open the door, adding productivity, especially when a bar feeder is attached.



Auto Door

Using M-code, the doors can be automatically opened and closed which brings productivity and convenience for automation.



Parts Conveyor

The parts conveyor transfers the finished workpiece unloaded by the parts catcher for user convenience.



Auto Shutter

Using auto shutter, automation system with gantry loader is possible without opening the machine's door.

HIGH PRECISION SYSTEM



Automatic Q-Setter

Cutting tools are calibrated quickly and accurately with the addition of a q-setter. Each tool tip is touched off manually using a sensor that inputs the position automatically.



Linear Scale

Linear scales increase positioning accuracy and reduce distortion caused by thermal growth, thus ensuring a more accurate finished part



Work Probe


Workpiece coordinate values can be set automatically using the optional spindle probe.

Optional

GANTRY LOADER SYSTEM

Gantry Loader Machining Process

The high speed gantry loaders and the work stocker allow the implementation of automation cells. This enables flexible machining process and productivity enhancement. Optimization of the installation space is also possible.

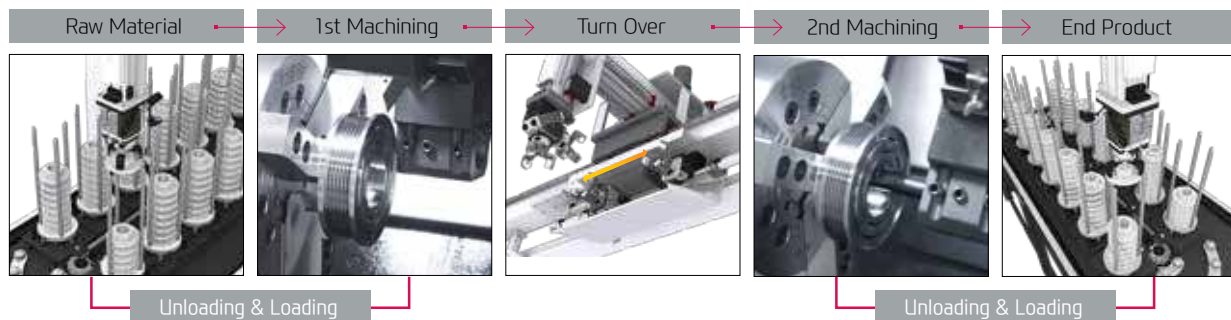

COOLANT UNIT & ECO SYSTEM



Standard Coolant (Nozzle)

Chuck Coolant (Upper Chuck)

Chuck Air Blow (Upper Chuck)

Air Gun



MQL : Minimal Quantity Lubrication

Oil Skimmer

Mist Collector

Grease Lubrication Device

05 HYUNDAI WIA FANUC – SMART PLUS

The Compatible All-round Control



15" Touch-type Monitor as a standard

	Fast Cycle Time Technology
Smart Machine Control	Fine Surface Technology
	Smart Servo Control Technology
Conversational Program	SmartGuide-i
i-HMI	Machining-aid Function
Part Program Storage	5120M (2MB)
No. of Registerable Programs	1000 EA




SMART SOFTWARE



Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

Convenience Function S/W

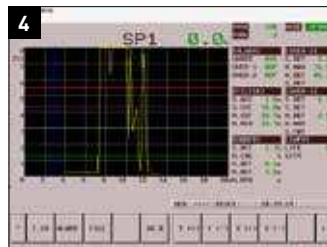

1. Thermal Displacement Compensation (HW-TDC) OPTION
 This software improves processing precision by minimizing thermal deformation from changes in external environments and machining.

2. Machine Guidance (HW-MCG)
 This software offers various user convenience functions such as tool manipulation, maintenance, tool monitoring, and a pop-up/status

3. LAUNCHER
 This software offers shortcuts for quick access to specialized features and frequently used features.

4. Tool Monitoring (HW-TM) OPTION
 This tool status monitoring software monitors and protects workpiece, tools, and equipment through real-time monitoring of the motor load from machining.

Machining Support S/W



1. Premium Tool Operation
 This software offers premium graphic functions for more intuitive tool operation. (Only in iHMI tools)

2. Manual Viewer
 This software enables users to view electronic manuals right from the tool. (Only in iHMI tools)

3. Scheduling
 This software enables viewing/setting up directly from the tool. This allows such actions as managing customer's tool schedules and schedule notification. (Only in iHMI tools)

4. Operation Memo
 This software is capable of managing customer notes such as tool information and issues. (Only in iHMI tools)

SPECIFICATIONS

Standard & Optional

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable

Spindle		HD2200	HD2200C
Main Spindle	8"	●	-
Hollow Chuck 3 Jaw	10"	○	●
Main Spindle	8"	-	-
Solid Chuck 3 Jaw	10"	-	-
Standard Soft Jaw (1set)		●	●
Chuck Clamp Foot Switch		●	●
2 Steps Hyd. Pressure Device		○	○
Spindle Inside Stopper		☆	☆
5" Index		☆	☆
Cs-Axis (0.001")		-	-
Chuck Open/Close Confirmation Device		●	●
2 Steps Chuck Foot Switch		○	○
Turret			
Tool Holder		●	●
Mill Turret	BMT	-	-
Straight Milling Head (Axial)	Collet Type,1ea	-	-
Angular Milling Head (Radial)	Collet Type,1ea	-	-
Straight Milling Head (Axial)	Adapter Type	-	-
Angular Milling Head (Radial)	Adapter Type	-	-
Boring Sleeve		●	●
Drill Socket		●	●
U-Drill Holder		○	○
U-Drill Holder Sleeve		○	○
O.D Extension Holder	For Out-Dia	○	●
Angle Head		-	-
Tail Stock & Steady Rest			
Quill Type Tail Stock	MT#4 (Ø65(Ø2.6))	●	●
	MT#4 (Ø80(Ø3.1))	○	○
	MT#5 (Ø100(Ø3.9))	○	○
Programmable Tail Stock	MT#4 (Ø65(Ø2.6))	○	○
	MT#4 (Ø80(Ø3.1))	○	○
Built-in Tail Stock	MT#4 (Ø100(Ø3.9))	○	○
Manual Type Hyd. Steady Rest		-	-
Standard Live Center (Tail Stock : Standard)		●	●
High Precision Live Center		-	-
2 Steps Tail Stock Pressure System		☆	☆
Quill Forward/Reverse Confirmation Device		○	○
Tail Stock Foot Switch		☆	☆
Coolant & Air Blow			
Standard Coolant (Nozzle)		●	●
Chuck Coolant (Upper Chuck)		○	○
Gun Coolant		○	○
Through Spindle Coolant (Only for Special Chuck)		☆	☆
Chuck Air Blow (Upper Chuck)		○	○
Tail Stock Air Blow (Upper Tail Stock)		○	○
Turret Air Blow		☆	☆
Air Gun		○	○
Through Spindle Air Blow (Only for Special Chuck)		-	-
High Pressure Coolant	0.5Bar (7.3psi)	●	●
	6Bar (87psi)	○	○
	20Bar (290psi)	○	○
Power Coolant System (For Automation)		☆	☆
Coolant Chiller (Only for Sub Tank, Chip Conveyor)		-	-
Chip Disposal			
Coolant Tank	150 ℓ (39.6gal)(Side)	●	●
	180 ℓ (47.6gal)(Side)	● (Only for High Pressure Coolant 20 bar [290psi])	●
	210 ℓ (55.5gal)(Rear)	○	○
Chip Conveyor (Hinge/Scraper/Screw)	Front (Right)	○	○
	Rear (Rear)	○	○
Special Chip Conveyor (Drum Filter)		-	-
Chip Wagon	Standard (180 ℓ [47.5 gal])	○	○
	Swing (200 ℓ [52.8 gal])	○	○
	Large Swing (290 ℓ [76.6 gal])	○	○
	Large Size (330 ℓ [87.2 gal])	○	○
	Customized	☆	☆

Safety Device		HD2200	HD2200C
Total Splash Guard		●	●
Electric Device			
Call Light	1Color : ●	●	●
Call Light & Buzzer	3Color : ● ● ● B	○	○
Electric Cabinet Light		○	○
Remote MPG		-	-
Work Counter	Digital	○	○
Total Counter	Digital	○	○
Tool Counter	Digital	○	○
Multi Tool Counter	Digital	○	○
Electric Circuit Breaker		○	○
AVR (Auto Voltage Regulator)		☆	☆
Transformer	25kVA	○	○
Auto Power Off		○	○
Measurement			
Manual Q-Setter		○	○
Manual Q-Setter (Renishaw)		○	○
Automatic Q-Setter (Renishaw)		○	○
Work Close Confirmation Device (Only for Special Chuck)	TACO	○	○
	SMC	○	○
Auto Tool Measuring Device		○	○
Linear Scale	X Axis	-	-
	Z Axis	-	-
Coolant Level Sensor (Only for Chip Conveyor, bladder Type)		☆	☆
Environment			
Air Conditioner		○	○
Oil Mist Collector		☆	☆
Oil Skimmer (Only for Chip Conveyor)		○	○
MQL (Minimal Quantity Lubrication)		☆	☆
Fixture & Automation			
Auto Door		○	○
Auto Shutter (Only for Automatic System)		○	○
Sub Operation Panel		☆	☆
Bar Feeder Interface		○	○
Bar Feeder (FEDEK)		☆	☆
Workpusher (Spring type)		○	○
Extra M-Code 4ea		○	○
Automation Interface		☆	☆
I/O Extension (IN & OUT)	16 Contact	○	○
	32 Contact	○	○
Parts Catcher	Main SP.	○	○
Turret Work Pusher (For Automation)		☆	☆
Parts Conveyor (Required Main Parts Catcher)		☆	☆
Semi Automation System		☆	☆
Hyd. Device			
Standard Hyd. Cylinder	Hollow	●	●
Standard Hyd. Unit	35bar (507.6 psi)/ 15 ℓ (4gal)	●	●
S/W			
Conversational program	SmartGuide-i	●	●
	HW-DPRO	○	○
Thermal Displacement Compensation (HW-TDC)		○	○
Tool Monitoring (HW-TM)		○	○
Machine Guidance (HW-MCG)		●	●
Energy Saving System (HW-ESS)		●	●
DNC software (HW-eDNC)		○	○
Machine Monitoring System (HW-MMS)		○	○
Thermal Displacement Compensation Device		○	○
Premium Tool Operation		●	●
Manual Viewer		●	●
Scheduling		●	●
Operation Memo		●	●
ETC			
Tool Box		●	●
Customized Color	Need Munsel No.	☆	☆
CAD & CAM		☆	☆

❖ 4 channel of TDC(Thermal Displacement Compensation) device is recommended, when more than 6 bar of high pressure coolant is applied, for the high quality machining.
Specifications are subject to change without notice for improvement.

SPECIFICATIONS

Standard & Optional

Spindle		HD2200M	HD2200MC
Main Spindle	8"	●	-
Hollow Chuck 3 Jaw	10"	○	●
Main Spindle	8"	-	-
Solid Chuck 3 Jaw	10"	-	-
Standard Soft Jaw (1set)		●	●
Chuck Clamp Foot Switch		●	●
2 Steps Hyd. Pressure Device		○	○
Spindle Inside Stopper		☆	☆
5° Index		☆	☆
Cs-Axis (0.001°)		●	●
Chuck Open/Close Confirmation Device		●	●
2 Steps Chuck Foot Switch		○	○
Turret			
Tool Holder		●	●
Mill Turret	BMT	●	●
Straight Milling Head (Axial)	Collet Type, 1ea	●	●
Angular Milling Head (Radial)	Collet Type, 1ea	●	●
Straight Milling Head (Axial)	Adapter Type	○	○
Angular Milling Head (Radial)	Adapter Type	○	○
Boring Sleeve		●	●
Drill Socket		○	○
U-Drill Holder		●	●
U-Drill Holder Sleeve		●	●
O.D Extension Holder	For Out-Dia	-	-
Angle Head		☆	☆
Tail Stock & Steady Rest			
Quill Type Tail Stock	MT#4 (Ø65(Ø2.6))	●	●
	MT#4 (Ø80(Ø3.1))	○	○
	MT#5 (Ø100(Ø3.9))	○	○
Programmable Tail Stock	MT#4 (Ø65(Ø2.6))	○	○
	MT#4 (Ø80(Ø3.1))	○	○
Built-in Tail Stock	MT#4 (Ø100(Ø3.9))	○	○
Standard Live Center (Tail Stock : Standard)		●	●
High Precision Live Center		-	-
2 Steps Tail Stock Pressure System		☆	☆
Quill Forward/Reverse Confirmation Device		○	○
Tail Stock Foot Switch		☆	☆
Coolant & Air Blow			
Standard Coolant (Nozzle)		●	●
Chuck Coolant (Upper Chuck)		○	○
Gun Coolant		○	○
Through Spindle Coolant (Only for Special Chuck)		☆	☆
Thru Coolant for Live Tool		○	○
Chuck Air Blow (Upper Chuck)		○	○
Tail Stock Air Blow (Upper Tail Stock)		○	○
Turret Air Blow		☆	☆
Air Gun		○	○
Through Spindle Air Blow (Only for Special Chuck)		-	-
High Pressure Coolant	0.5Bar (7.3psi)	●	●
	6Bar (87psi)	○	○
	20Bar (290psi)	○	○
Power Coolant System (For Automation)		☆	☆
Coolant Chiller (Only for Sub Tank, Chip Conveyor)		-	-
Chip Disposal			
Coolant Tank	150 ℓ (39.6gal)(Side)	●	●
	180 ℓ (47.6gal)(Side)	● (Only for High Pressure Coolant 20 bar (290psi))	●
	210 ℓ (55.5gal)(Rear)	○	○
Chip Conveyor (Hinge/Scraper/Screw)	Front (Right)	○	○
	Rear (Rear)	○	○
Special Chip Conveyor (Drum Filter)		-	-
Chip Wagon	Standard (180 ℓ [47.5 gal])	○	○
	Swing (200 ℓ [52.8 gal])	○	○
	Large Swing (290 ℓ [76.6 gal])	○	○
	Large Size (330 ℓ [87.2 gal])	○	○
	Customized	☆	☆

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable


Safety Device		HD2200M	HD2200MC
Total Splash Guard		●	●
Electric Device			
Call Light	1Color : ●	●	●
Call Light & Buzzer	3Color : ●●● B	○	○
Electric Cabinet Light		○	○
Remote MPG		-	-
Work Counter	Digital	○	○
Total Counter	Digital	○	○
Tool Counter	Digital	○	○
Multi Tool Counter	Digital	○	○
Electric Circuit Breaker		○	○
AVR (Auto Voltage Regulator)		☆	☆
Transformer	25KVA	○	○
Auto Power Off		○	○
Measurement			
Manual Q-Setter		○	○
Manual Q-Setter (Renishaw)		○	○
Automatic Q-Setter (Renishaw)		○	○
Work Close Confirmation Device (Only for Special Chuck)	TACO SMC	○	○
Auto Tool Measuring Device		○	○
Linear Scale	X Axis	-	-
	Z Axis	-	-
Coolant Level Sensor (Only for Chip Conveyor, bladder Type)		☆	☆
Environment			
Air Conditioner		○	○
Oil Mist Collector		☆	☆
Oil Skimmer (Only for Chip Conveyor)		○	○
MQL (Minimal Quantity Lubrication)		☆	☆
Fixture & Automation			
Auto Door		○	○
Auto Shutter (Only for Automatic System)		○	○
Sub Operation Panel		☆	☆
Bar Feeder Interface		○	○
Bar Feeder (FEDEK)		☆	☆
workpusher (Spring type)		○	○
Extra M-Code 4ea		○	○
Automation Interface		☆	☆
I/O Extension (IN & OUT)	16 Contact	○	○
	32 Contact	○	○
Parts Catcher		○	○
Turret Work Pusher (For Automation)		☆	☆
Parts Conveyor (Required Main Parts Catcher)		☆	☆
Semi Automation System		☆	☆
Hyd. Device			
Standard Hyd. Cylinder	Hollow	●	●
Standard Hyd. Unit	35bar (507.6 psi)/ 15 ℓ (4gal)	●	●
S/W			
Conversational program	SmartGuide-i	●	●
	HW-DPRO	○	○
Thermal Displacement Compensation (HW-TDC)		○	○
Tool Monitoring (HW-TM)		○	○
Machine Guidance (HW-MCG)		●	●
Energy Saving System (HW-ESS)		●	●
DNC software (HW-eDNC)		○	○
Machine Monitoring System (HW-MMS)		○	○
Thermal Displacement Compensation Device		○	○
Premium Tool Operation		●	●
Manual Viewer		●	●
Scheduling		●	●
Operation Memo		●	●
ETC			
Tool Box		●	●
Customized Color	Need Munsel No.	☆	☆
CAD & CAM		☆	☆

❖ 4 channel of TDC(Thermal Displacement Compensation) device is recommended, when more than 6 bar of high pressure coolant is applied, for the high quality machining.
Specifications are subject to change without notice for improvement.


SPECIFICATIONS

Spindle Output/Torque Diagram (FANUC)


HD2200/M 4,500rpm

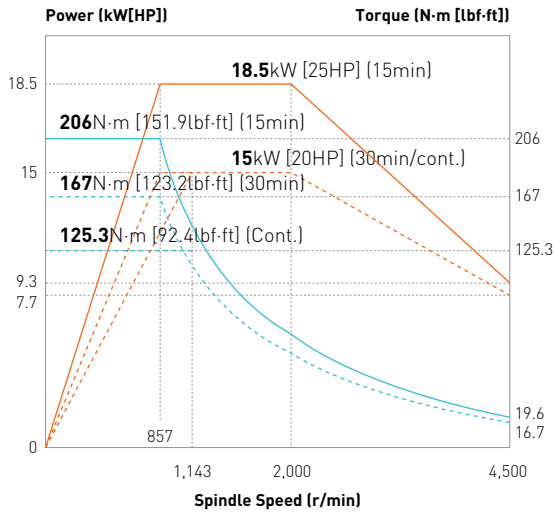


HD2200/M 4,000rpm (High-Torque)

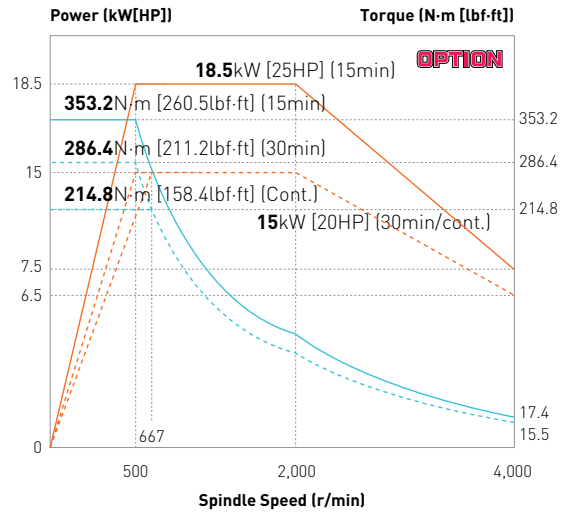

HD2200C/MC 3,500rpm

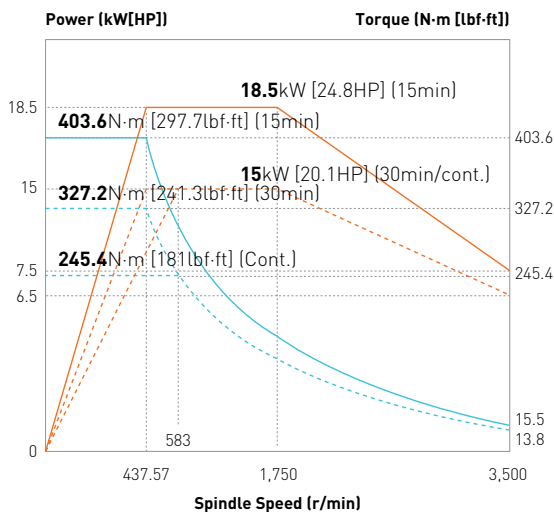


BMT55 6,000 rpm

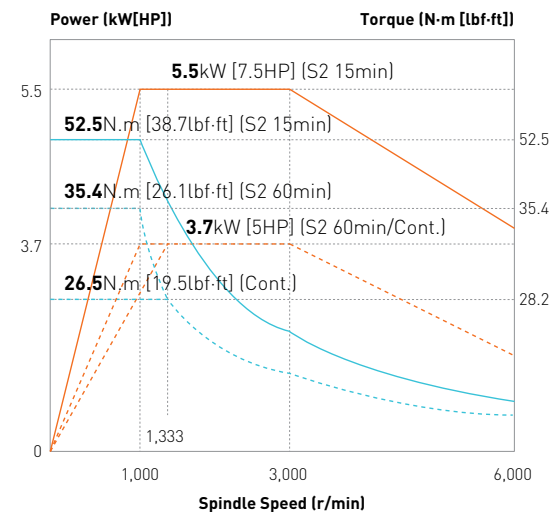

SPECIFICATIONS

Spindle Output/Torque Diagram (HYUNDAI-iTROL)



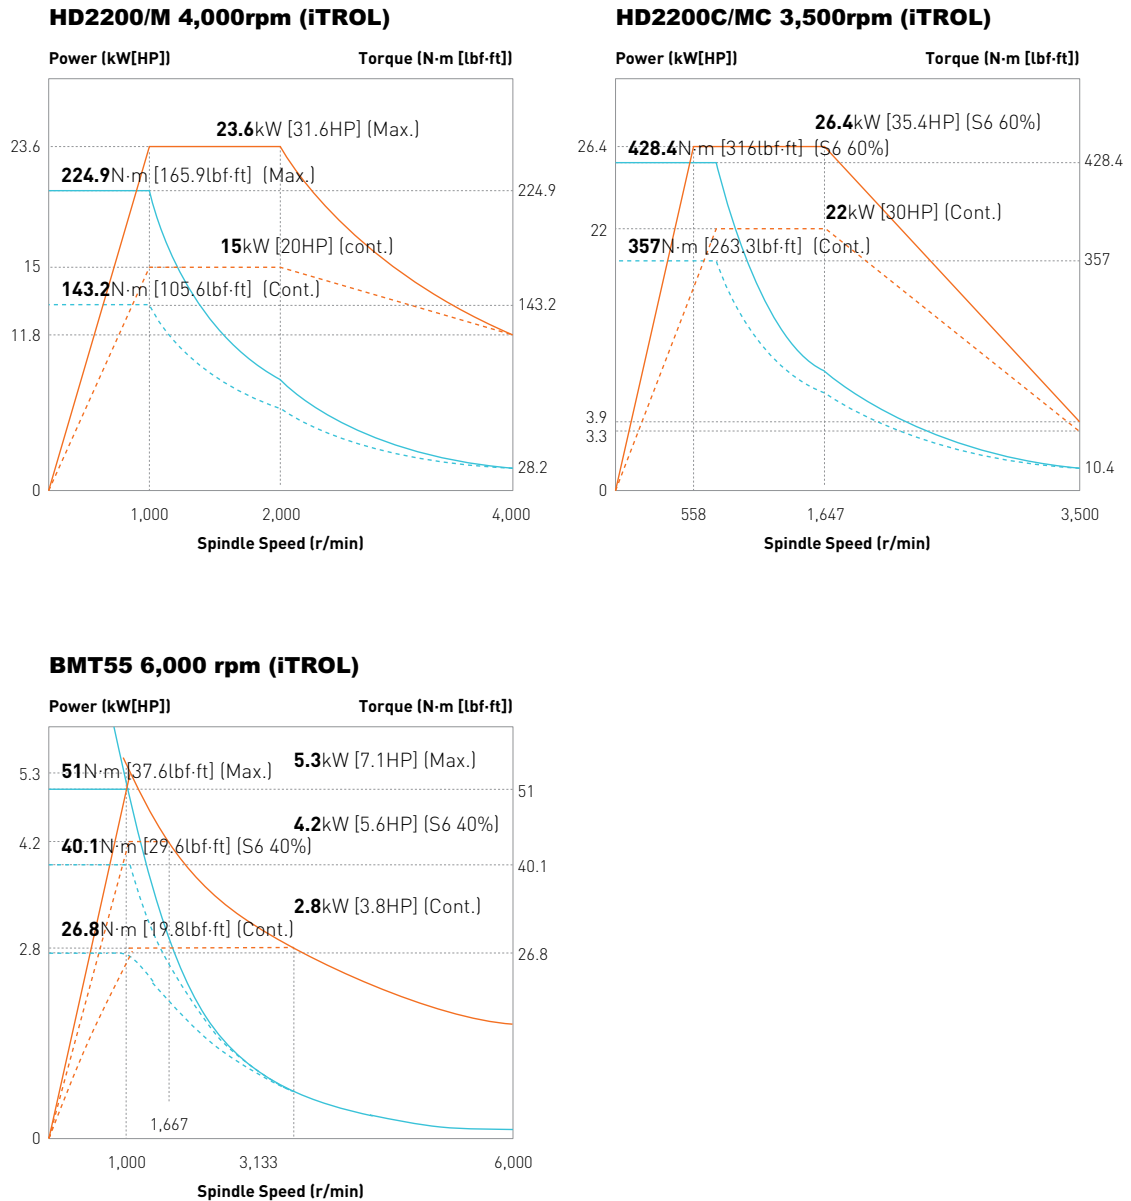


SPECIFICATIONS

External Dimensions

unit : mm(in)

HD2200/M
HD2200C/MC

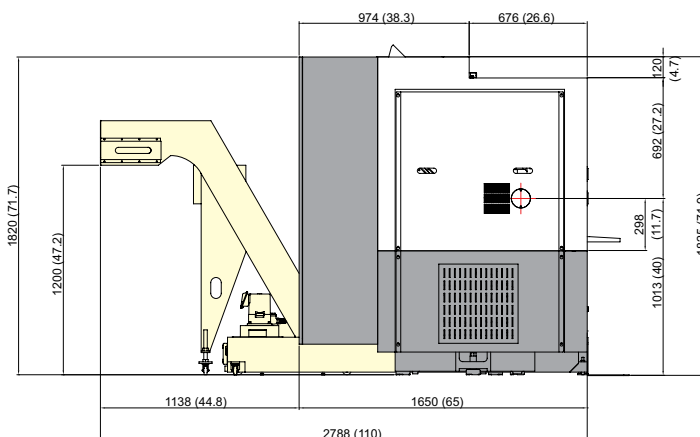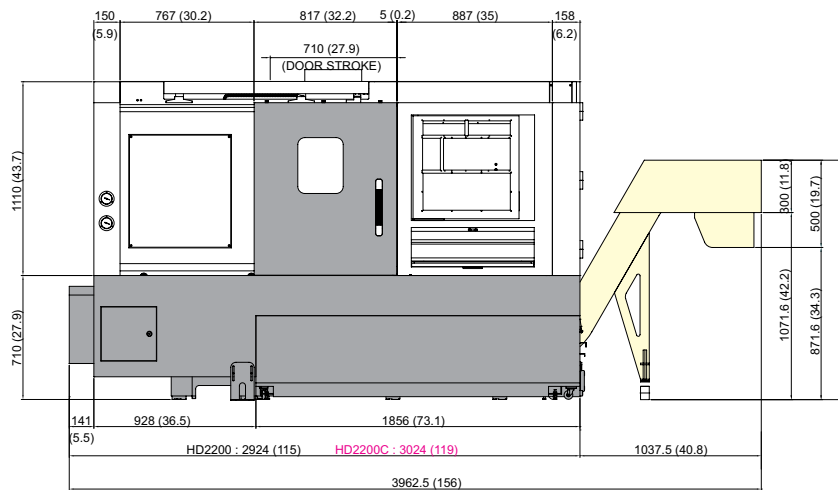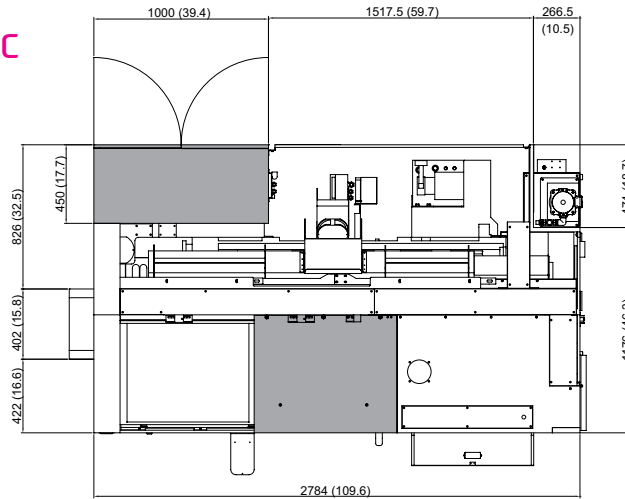


SPECIFICATIONS

Tooling System

unit : mm(in)

HD2200 | HD2200C

 Option

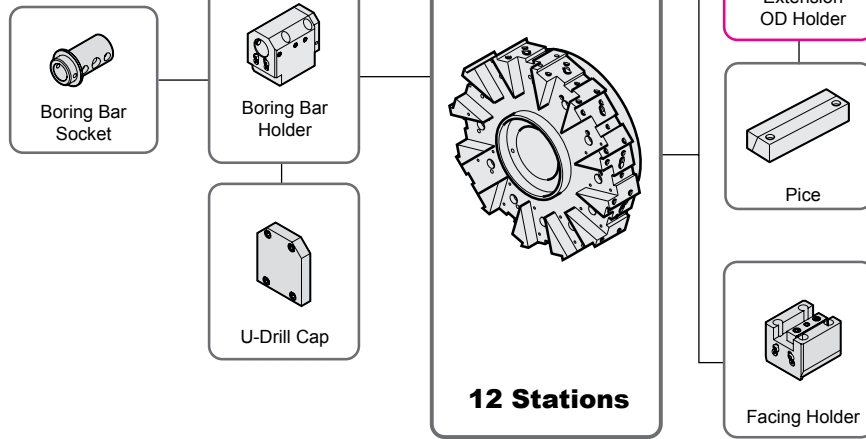

Tooling Parts Detail

ITEM			HD2200		HD2200C	
			mm Unit	inch Unit	mm Unit	inch Unit
Turning Holder	O.D Holder	Extension (40mm)	Opt.	Opt.	1	1
	Facing Holder		1	1	1	1
Boring Holder	I.D Holder	Single (Ø40, Ø1 1/2")	5	5	4	4
	U-Drill Holder	Cap	1	1	1	1
Driven Holder	Straight Mill Holder	Standard	-	-	-	-
		TTC	-	-	-	-
	Angular Mill Holder	Standard	-	-	-	-
		TTC	-	-	-	-
Socket	Boring	Ø10 (Ø3/8")	1	-	1	-
		Ø12 (Ø1/2")	1	1	1	1
		Ø16 (Ø5/8")	1	-	1	-
		Ø20 (Ø3/4")	1	1	1	1
		Ø25 (Ø1")	1	1	1	1
		Ø32 (Ø1 1/4")	1	1	1	1
	Drill	MT 1 × MT 2	1	1	1	1
		MT 2	1	1	1	1
	ER Collet		-	-	-	-


Specifications are subject to change without notice for improvement.

SPECIFICATIONS

Tooling System

unit : mm(in)

HD2200M/MC

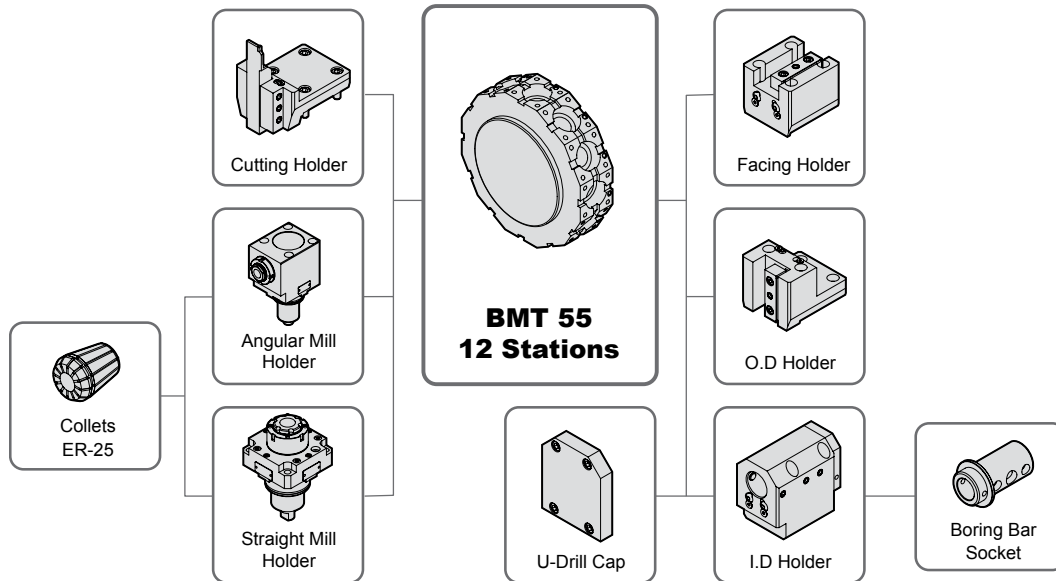

Tooling Parts Detail


ITEM			HD2200M		HD2200MC	
			mm Unit	inch Unit	mm Unit	inch Unit
Turning Holder	O.D Holder	Right/Left	4	4	4	4
	Cutting Holder		1	1	1	1
	Facing Holder		1	1	1	1
Boring Holder	I.D Holder	Single (Ø40, Ø1 1/2")	4	4	4	4
	U-Drill Holder	Cap	1	1	1	1
Driven Holder	Straight Mill Holder	Standard	1	1	1	1
		TTC	Opt.	Opt.	Opt.	Opt.
	Angular Mill Holder	Standard	1	1	1	1
		TTC	Opt.	Opt.	Opt.	Opt.
Socket	Boring	Ø10 (Ø3/8")	1	1	1	1
		Ø12 (Ø1/2")	1	1	1	1
		Ø16 (Ø5/8")	1	1	1	1
		Ø20 (Ø3/4")	1	1	1	1
		Ø25 (Ø1")	1	1	1	1
		Ø32 (Ø1 1/4")	1	1	1	1
	Drill	MT 1 × MT 2	Opt.	Opt.	Opt.	Opt.
		MT 2	Opt.	Opt.	Opt.	Opt.
		MT 3	Opt.	Opt.	Opt.	Opt.
	ER Collet		1 Set	1 Set	1 Set	1 Set

SPECIFICATIONS


Interference

unit : mm(in)


HD2200

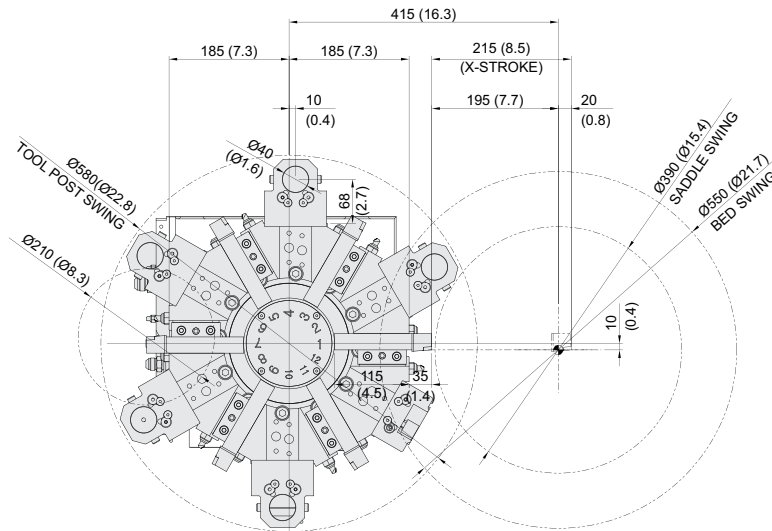

HD2200C

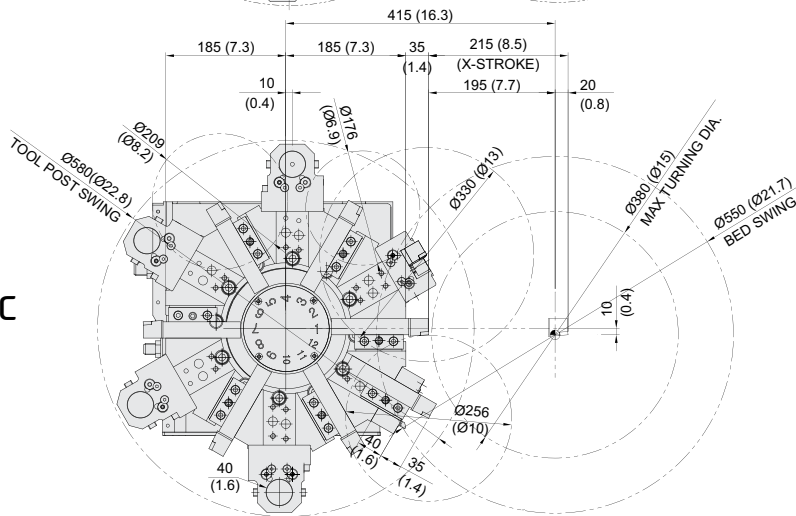

HD2200M
HD2200MC

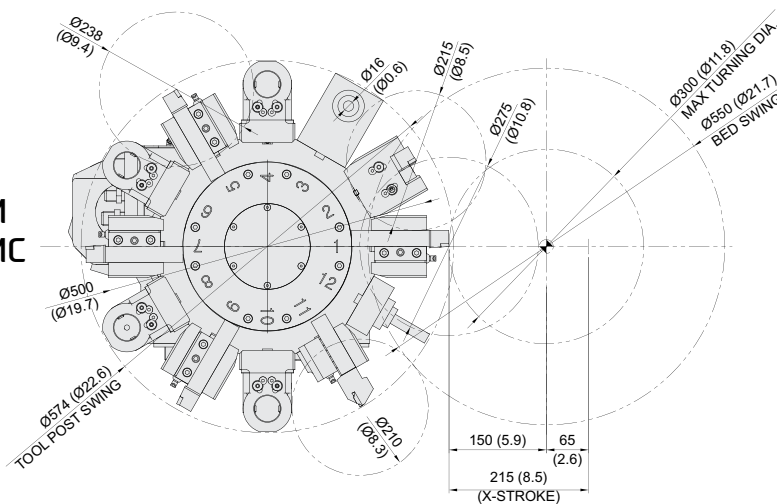

If the tool is placed differently from the picture above, it may interfere with the chuck when applying the O.D Extension holder.


SPECIFICATIONS

Tooling Travel Range


unit : mm(in)

HD2200M

O.D. Tool holder

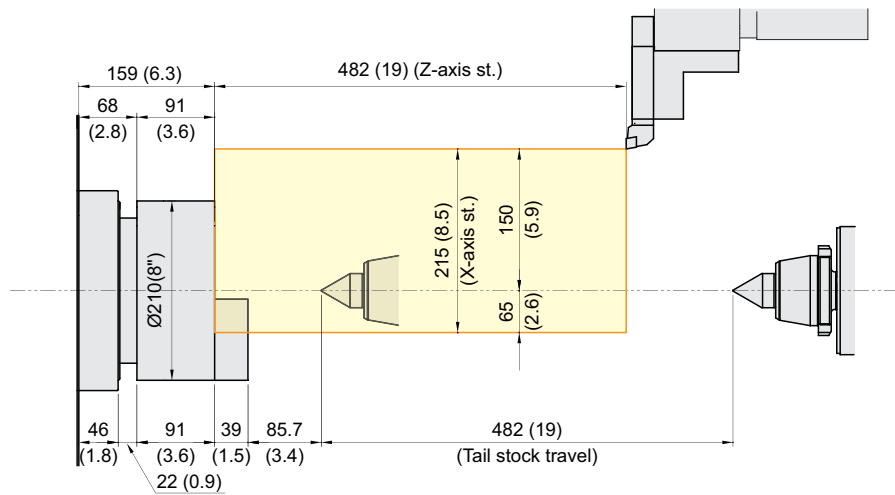

I.D. Tool holder

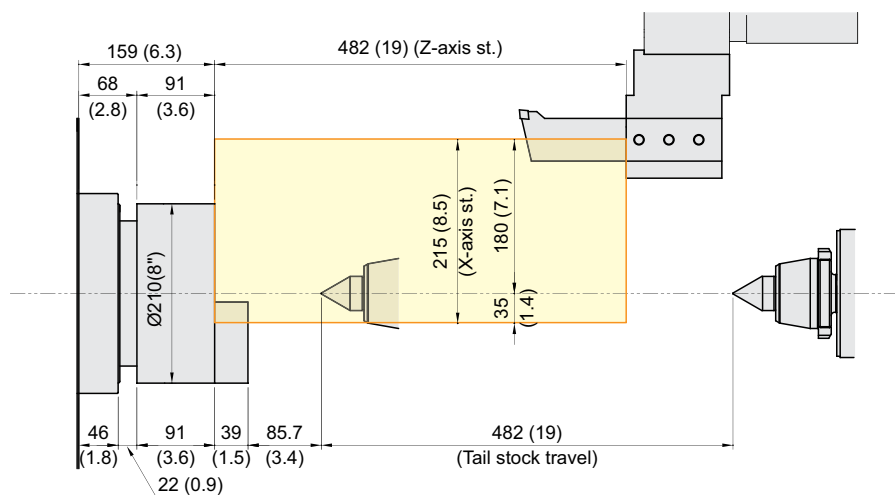


SPECIFICATIONS

Tooling Travel Range


unit : mm(in)

HD2200M


Straight Mill Holder

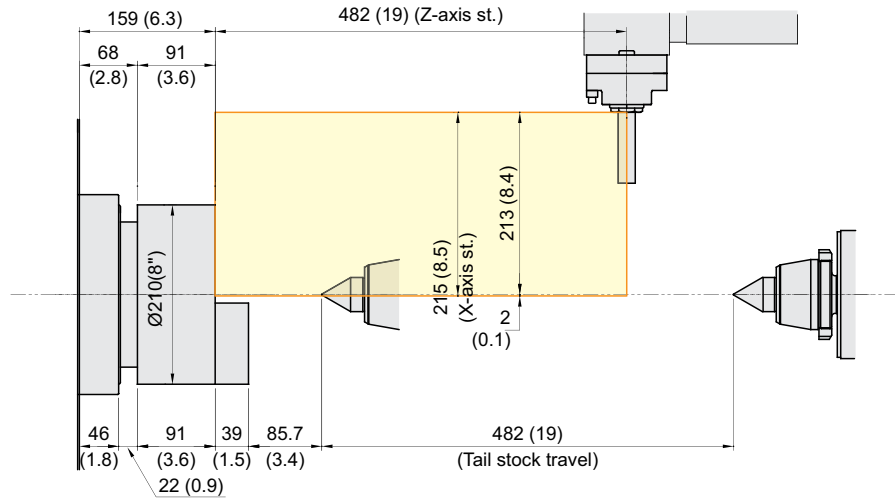

Angular Mill Holder

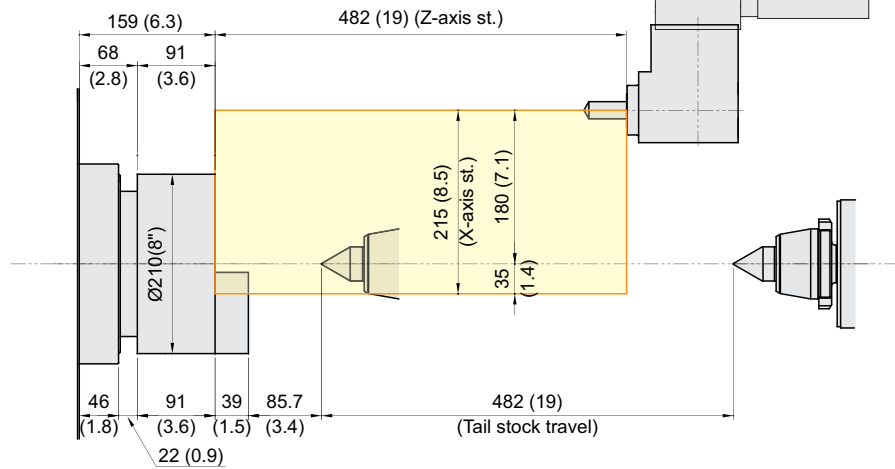

Face Tool holder

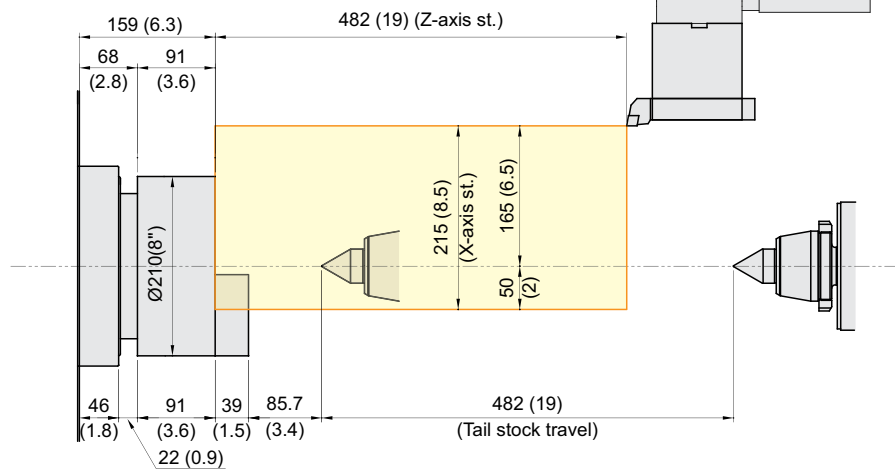


SPECIFICATIONS

Tooling Travel Range


unit : mm(in)

HD2200MC

O.D. Tool holder

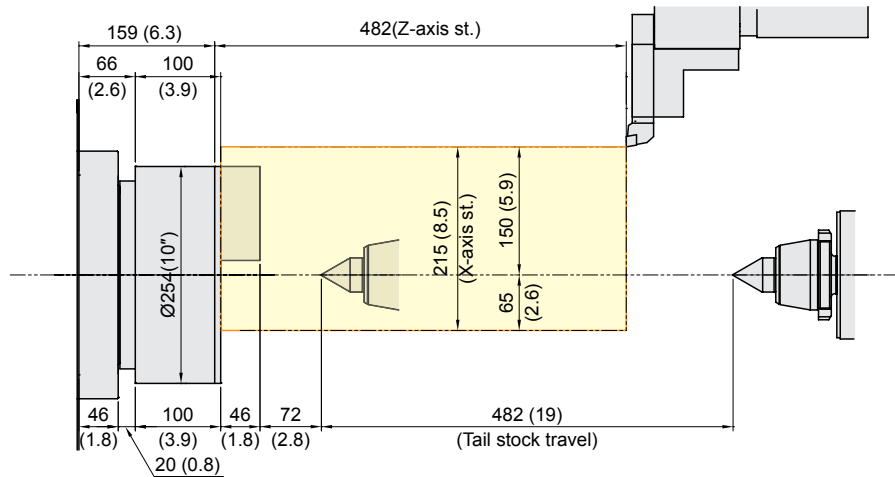

I.D. Tool holder

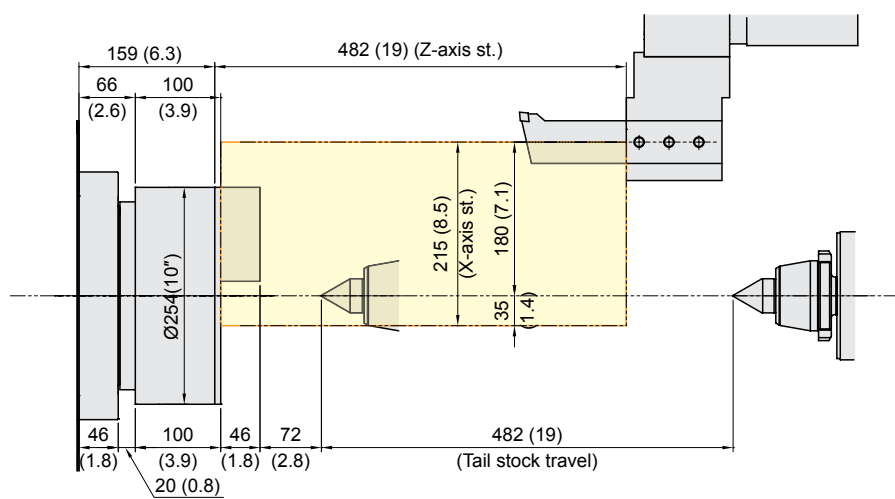

SPECIFICATIONS

Specifications

[] : Option

ITEM		HD2200	HD2200C	
CAPACITY	Swing Over the Bed	mm(in)	Ø550 (21.7")	
	Swing Over the Carriage	mm(in)	Ø390 (15.4")	
	Max. Turning Dia.	mm(in)	Ø380 (15")	
	Max. Turning Length	mm(in)	565 (22.2")	550 (21.7")
	Bar Capacity	mm(in)	Ø65 (2.6")	Ø81 (3.2")
SPINDLE	Chuck Size	inch	8" [10"]	10"
	Spindle Bore	mm(in)	Ø76 (3")	Ø92 (3.6")
	Spindle Speed (rpm)	r/min	4,500 [4,000] [4,000]	3,500 [3,500]
	Motor (Max/Cont.)	kW(HP)	18.5/15 (25/20) [18.5/15 (25/20)] [23.5/15 (31.5/20)]	18.5/15 (25/20) [26.4/22 (35.4/30)]
	Torque (Max/Cont.)	N·m(lbf·ft)	206/125.3 (151.9/92.4) [353.2/214.8 (260.5/158.4)] [225/143.2 (166/105.6)]	403.6/245.4(297.7/181) [428.4/357 (314/263.3)]
	Spindle Type	-	BELT	
	Spindle Nose	-	A2-6	A2-8
	C-axis Indexing	deg	-	
FEED	Travel (X/Z/B)	mm(in)	215/580 (8.5"/22.8")	
	Rapid Traverse Rate (X/Z)	m/min(ipm)	24/30 (945/1,181)	
	Slide Type	-	BOX GUIDE	
TURRET	No. of Tools	EA	12	
	Tool Size	OD	mm(in)	□25 (1")
		ID	mm(in)	Ø40 (1.6")
	Indexing Time	sec/step	0.12	
LIVE TOOL	Motor (Max/Cont.)	kW(HP)	-	
	Milling Tool Speed (rpm)	r/min	-	
	Torque (Max/Cont.)	N·m(lbf·ft)	-	
	Collet Size	mm(in)	-	
	Type	-	-	
TAIL STOCK	Taper	-	MT#4 [MT#5]	
	Quill Dia.	mm(in)	Ø65 (2.6") [Ø100 (3.9")]	
	Quill Travel	mm(in)	80 (3.1") [120 (4.7")]	
	Travel	mm(in)	513.7 (20.2")	
TANK CAPACITY	Coolant Tank	ℓ (gal)	150 (39.6)	
	Lubricating Tank	ℓ (gal)	1.8 (0.5)	
POWER SUPPLY	Electric Power Supply	kVA	23	
	Thickness of Power Cable	Sq	OVER 16	
	Voltage	V/Hz	220/60 (200/50*)	
MACHINE	Floor Space (L×W)	mm(in)	2,925×1,650 (115.2"×65")	3,024×1,650 (119"×65")
	Height	mm(in)	1,820 (71.7")	
	Weight	kg(lb)	4,100 (9,039)	4,200 (9,259)
PC	Controller	-	HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]	

*) Using 50Hz voltage instead of 60Hz may lower the output of motors. (excluding servo motors and inverter motors)
Specifications are subject to change without notice for improvement.

SPECIFICATIONS

Specifications

[] : Option

ITEM		HD2200M	HD2200MC	
CAPACITY	Swing Over the Bed	mm(in)	Ø550 (21.7")	
	Swing Over the Carriage	mm(in)	Ø390 (15.4")	
	Max. Turning Dia.	mm(in)	Ø300 (11.8")	
	Max. Turning Length	mm(in)	467 (18.4")	452 (17.8")
	Bar Capacity	mm(in)	Ø65 (2.6")	Ø81 (3.2")
SPINDLE	Chuck Size	inch	8" [10"]	10"
	Spindle Bore	mm(in)	Ø76 (3")	Ø92 (3.6")
	Spindle Speed (rpm)	r/min	4,500 [4,000] [4,000]	3,500 [3,500]
	Motor (Max/Cont.)	kW(HP)	18.5/15 (24.8/20.1) [18.5/15 (24.8/20.1)] [23.5/15 (31.5/20.1)]	18.5/15 (24.8/20.1) [26.4/22 (35.4/30)]
	Torque (Max/Cont.)	N·m(lbf·ft)	206/125.3 (151.9/92.4) [353.2/214.8 (260.5/158.4)] [225/143.2 (166/105.6)]	403.6/245.4(297.7/181) [428.4/357 (314/263.3)]
	Spindle Type	-	BELT	
	Spindle Nose	-	A2-6	A2-8
	C-axis Indexing	deg	0.001°	
FEED	Travel (X/Z/B)	mm(in)	215/482 (8.5"/19")	
	Rapid Traverse Rate (X/Z)	m/min(ipm)	24/30 (945/1,181)	
	Slide Type	-	BOX GUIDE	
TURRET	No. of Tools	ea	12	
	Tool Size	OD	mm(in)	□ 25 (1")
		ID	mm(in)	Ø40 (1.6")
	Indexing Time	sec/step	0.2	
LIVE TOOL	Motor (Max/Cont.)	kW(HP)	5.5/3.7 (7.5/5) [5.3/2.8 (7.1/3.8)]	
	Milling Tool Speed (rpm)	r/min	6,000 [6,000]	
	Torque (Max/Cont.)	N·m(lbf·ft)	52.5/26.5 (38.7/19.5) [51/26.8 (37.6/19.8)]	
	Collet Size	mm(in)	Ø16 (0.6") : ER25	
	Type	-	BMT55	
TAIL STOCK	Taper	-	MT#4 [MT#5]	
	Quill Dia.	mm(in)	Ø65 (2.6") [Ø100 (3.9")]	
	Quill Travel	mm(in)	80 (3.1") [120 (4.7")]	
	Travel	mm(in)	513.7 (20.2")	
TANK CAPACITY	Coolant Tank	ℓ (gal)	150 (39.6)	
	Lubricating Tank	ℓ (gal)	1.8 (0.5)	
POWER SUPPLY	Electric Power Supply	kVA	23	
	Thickness of Power Cable	Sq	OVER 16	
	Voltage	V/Hz	220/60 (200/50*)	
MACHINE	Floor Space (L×W)	mm(in)	2,925×1,650 (115.2"×65")	3,024×1,650 (119"×65")
	Height	mm(in)	1,820 (71.7")	
	Weight	kg(lb)	4,200 (9,259)	4,300 (9,480)
PC	Controller	-	HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]	

*) Using 50Hz voltage instead of 60Hz may lower the output of motors. (excluding servo motors and inverter motors)
Specifications are subject to change without notice for improvement.

CONTROLLER

HYUNDAI WIA FANUC – SMART PLUS

[] : Option

Controlled axis / Display / Accuracy Compensation	
Control axes	2 axes (X, Z) / 3 axes (X, Z, C) / 4 axes (X,Z,Y,C) 5 axes (X, Z, B, C, A) / 6 axes (X, Z, Y, B, C, A) 7 axes (X1/Z1, X2/Z2, B2, C1/C2)
Simultaneously controlled axes	2 axes [Max. 4 axes]
Designation of spindle axes	3 axes [Max. 4 axes]
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Inch / Metric conversion	G20 / G21
High response vector control	
Interlock	All axes / Each axis
Machine lock	All axes
Backlash compensation	± 0~9999 pulses (exc. Rapid traverse / Cutting feed)
Position switch	
LCD / MDI	15 inch LCD unit (with Touch Panel)
Feedback	Absolute motor feedback
Stored stroke check 1	Over travel
Stored stroke check 2, 3	
PMC axis control	
Operation	
Automatic operation (Memory)	
MDI operation	
DNC operation	Needed DNC software / CF card
Program restart	
Wrong operation prevention	
Program check function	Dry run
Single block	
Search function	Program Number / Sequence Number
Interpolation functions	
Pano interpolation	
Positioning	G00
Linear interpolation	G01
Circular interpolation	G02, G03
Exact stop mode	Single : G09, Continuous : G61
Dwell	G04, 0 ~ 9999.9999 sec
Skip	G31
Reference position return	1st reference : G28, 2nd reference : G30 Ref. position check : G27
Thread synchronous cutting	G33
Thread cutting retract	
Variable lead thread cutting	
Multi / Continuous threading	
Feed function / Acc. & Dec. control	
Manual feed	Rapid traverse Jog : 0~2,000 mm/min (79 ipm) Manual handle : x1, x10, x100 pulses Reference position return
Cutting Feed command	Direct input F code
Feedrate override	0 ~ 200% (10% Unit)
Rapid traverse override	1%, F25%, 50%, 100%
Override cancel	
Feed per minute	G98
Feed per revolution	G99
Look-ahead block	1 block
Program input	
Tape Code	EIA / ISO
Optional block skip	1 ea
Absolute / Incremental program	G90 / G91
Program stop / end	M00, M01 / M02, M30
Maximum command unit	± 999,999.999 mm (± 99,999.9999 inch)
Plane selection	X-Y : G17 / Z-X : G18 / Y-Z : G19
Workpiece coordinate system	G52, G53, 6 pairs (G54 ~ G59)
Manual absolute	Fixed ON
Programmable data input	G10
Sub program call	10 folds nested
Custom macro	#100 ~ #199, #500 ~ #999
G code system	A, B/C
Programmable mirror image	G51.1, G50.1
G code preventing buffering	G4.1
Direct drawing dimension program	Including Chamfering / Corner R
Conversational Program	SmartGuide-i

Program input	
Multiple repetitive cycles	I, II
Canned cycle for turning	
Auxiliary function / Spindle speed function	
Auxiliary function	M & 4 digit
Level-up M Code	High speed / Multi / Bypass M code
Spindle speed function	S & 5 digit, Binary output
Spindle override	0% ~ 150% (10% Unit)
Multi position spindle orientation	M19 (S##)
FSSB Rigid tapping	
Constant surface speed control	G96, G97
Tool function / Tool compensation	
Tool function	T & 2 digit + Offset 2 digit
Tool life management	
Tool offset pairs	128 pairs
Tool nose radius compensation	G40, G41, G42
Geometry / Wear compensation	
Direct input of offset measured B	
Editing function	
Part program storage size	5,120m (2MB)
No. of registerable programs	1,000 ea
Program protect	
Background editing	
Extended part program editing	Copy, move and change of NC program
Memory card program edit	
Data input / output & Interface	
I/O interface	CF card, USB memory Embedded Ethernet interface
Screen hard copy	
External message	
External key input	
External workpiece number search	
Automatic data backup	
Setting, display and diagnosis	
Self-diagnosis function	
History display & Operation	Alarm & Operator message & Operation
Run hour / Parts count display	
Maintenance information	
Actual cutting feedrate display	
Display of spindle speed / T code	
Graphic display	
Operating monitor screen	Spindle / Servo load etc.
Power consumption monitoring	Spindle & Servo
Spindle / Servo setting screen	
Multi language display	Support 24 languages
Display language switching	Selection of 5 optional Languages
LCD Screen Saver	Screen saver
Unexpected disturbance torque	BST (Back spin torque limit)
Function for machine type	
Cs contour control (C & A axes)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polar coordinate interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Cylindrical interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polygon turning (2 Spindles)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Canned cycle for drilling	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Spindle orientation expansion	MS, SY TTS, TTMS, TTSY
Spindle synchronous control	MS, SY TTS, TTMS, TTSY
Torque control	MS, SY TTS, TTMS, TTSY
Y axis offset	Y, SY, TTSY
Arbitrary angular control	Y, SY, TTSY
Composite / Superimposed control	MS, SY, TTS, TTMS, TTSY
Balance cutting	TTS, TTMS, TTSY
Option	
Additional optional block skip	9 ea
Fast ethernet	Needed option board
Data server	Needed option board
Protection of data at 8 levels	
Tool offset pairs	200 pairs
Helical interpolation	
Optional block skip	40 ea, 200 ea (AICC II)

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

CONTROLLER

HYUNDAI-iTROL

Control & Composition	
Number of axis/Spindles	2 axes (X, Z) / 3 axes (X, Z, C)
Number of axis/Spindles, max.	8 axes (Axis + Spindle)
Color display	TFT 10.4" Color (800 x 600)
Keyboard	QWERTY Full Keyboard
Part program storage	1MB, 3MB, 5MB
Addition of part program on CF card	
Transfer Function	
Feedrate override	0% ~ 200%
Transfer value input range	± 999999999
Unlimited rotation of rotation axis	
Acc./Dec. with jerk limitation	
Measuring systems 1 and 2, selectable	
Travel to fixed stop	
Auto servo drive tuning	
Spindle Function	
Spindle override	0% ~ 150%
Spindle speed, max. programmable value range	1000000 ~ 0.0001
Automatic gear stage selection	
Spindle orientation	
Spindle speed limitation	
Rigid tapping	
Spindle control with PLC	
Interpolation	
Linear interpolation axis, max.	4 axis
Circle via center point and end point	
Circle via interpolation point	
Helical interpolation	
Non-uniform rational B splines	
Continuous - path mode with programmable rounding clearance	
Program Function	
Subroutine levels, max.	7
Interrupt routines, max.	2
Number of levels for skip blocks	2
Polar Coordinates	
Dimensions inch/metric, changeover manually or via program	
Dynamic preprocessing memory FIFO	
Look ahead	1
Absolute/Incremental command	G90 / G91
Scaling/Rotation	
Read/Write system variables	
Block search	
Edit background	
Processing program number, max.	750
Using of CF Card, USB	
Basic coordinate number, max.	1
Work coordinate number, max.	100
Basic/Work coordinate programming change	
Scratching function	
Global and Local user data (GUD/LUD)	
Global program user data	
Conversational Cycle Program	
Tool Function	
Tool radius compensations	
Tool offset selection via T/D numbers	
Tools / Cutting edges in tool list	128 / 256, 256 / 512
Monitoring Function	
Working area limit	
Software and Hardware limit	
Zero-speed/Clamping monitoring	
2D/3D protection zones	
Contour monitoring	
Compensation	
Backlash compensation	
Leadscrew error compensation	
Measuring system error compensation	
Feedforward control (Speed control)	
Safety Function	
Safe torque off (STO)	
Safe brake control (SBC)	
Safe stop 1 (SS1)	
Diagnostic Function	
Alarm/Message, Alarm log	
PLC status/LAD online display	
PLC remote connection (Ethernet)	
Automation Support Function	
Actual velocity display	
Tool life management	As time / As amount
Work counter/Cycle time	Embedded
2D simulation	
Manual Operation	
Manual handle/Jog transfer	
Manual measurement of workpiece / tool offset	
Automatic tool/Workpiece measurement	
Automatic/Program reference approach	
Automatic Operation	
Program run as using CF card/USB	
Program control/modification	
Block search	
Reposition	
Preset (Set actual value)	
Data Transmission	
Ethernet network	
USB memory stick & CF card	
Convenience Function	
Processing setting	Coordinate system setting, Auto tool length measurement
Processing support	Tool Monitoring, Spindle overload monitoring
Maintenance	Turret Guidance, I/O monitoring, Manual
Management	Soft MCP, M/G code List
SMART machining	
Energy saving function (ECO)	
Machine Monitoring System (MMS Lite)	
Language	
Standard support language	Chinese Simplified, English, Korean
Option	
Maximum skip block number	10
DRF offset	
MDI program save/load	
Teach-In mode	
3D simulation	Except for working area/Collision check
Real time simulation	
Shop Turn	Conversational Program
Spline interpolation	
Program remote control in network	
Language	Chinese Traditional, French, German, Italian, Portuguese, Spanish

Figures in inch are converted from metric values. | Specifications are subject to change without notice for improvement.



You Tube HYUNDAI WIA MT

www.youtube.com/HYUNDAIWIAMT

EXPERIENCE THE NEW TECHNOLOGY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.



<http://machine.hyundai-wia.com>

HYUNDAI WIA Machine Tools
Global Links

HEADQUARTER

Changwon Technical Center/R&D Center/Factory 153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea TEL : +82 55 280 9114 FAX : +82 55 282 9114

Overseas Sales Team /R&D Center 37, Cheoldobangmulgwan-ro, Uiwang-si, Gyeonggi-do, Korea TEL : +82 31 8090 2539

OVERSEAS OFFICES

HYUNDAI WIA Machine America corp. 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

HYUNDAI WIA Europe GmbH Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany TEL : +49-0-6142-9256-0

HYUNDAI WIA Machine Tools China 2-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China TEL : +86-21-6427-9885

India Branch Office #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348

Vietnam Branch Office Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway 13, Thuan Giao, Thuan An, Binh Duong, Vietnam TEL : +84-3-5399-5099

2020-12 001.003 ENG