

# KM2600MTTS


HYUNDAI WIA Multitasking Machine

HYUNDAI  
**WIA**

# KM 2600MTTS



- Max. Turning Dia. (Mill/Turret)  
B axis 140° : Ø750(29.5"), B axis 90° : Ø630(24.8")/390 (15.4")
- Max. Turning Length 1,550 mm (61")
- Chuck Size Main/Sub : 10"
- Spindle Speed Main/Sub : 4,000 r/min
- Max. Spindle Power Main : 30 kW (40.2 HP), Sub : 26 kW (34.8 HP)
- Mill Speed 12,000 r/min
- Max. Mill Power 26 kW (34.8 HP)
- No. of Tools 36ea [Opt. 72ea]
- Travel (X1/Z1/Y/X2/Z2/ZB)  
705/1,595/250/250/1,500/1,586 mm(27.8"/62.8"/9.8"/9.8"/59"/62.4")
- B Axis Angle 240° (-30° ~ +210°)
- Rapid Traverse Rate (X1/Z1/Y/X2/Z2/ZB)  
40/40/40/30/20/15 m/min (1,575/ 1,575/ 1,575/1,181/787/591 ipm)

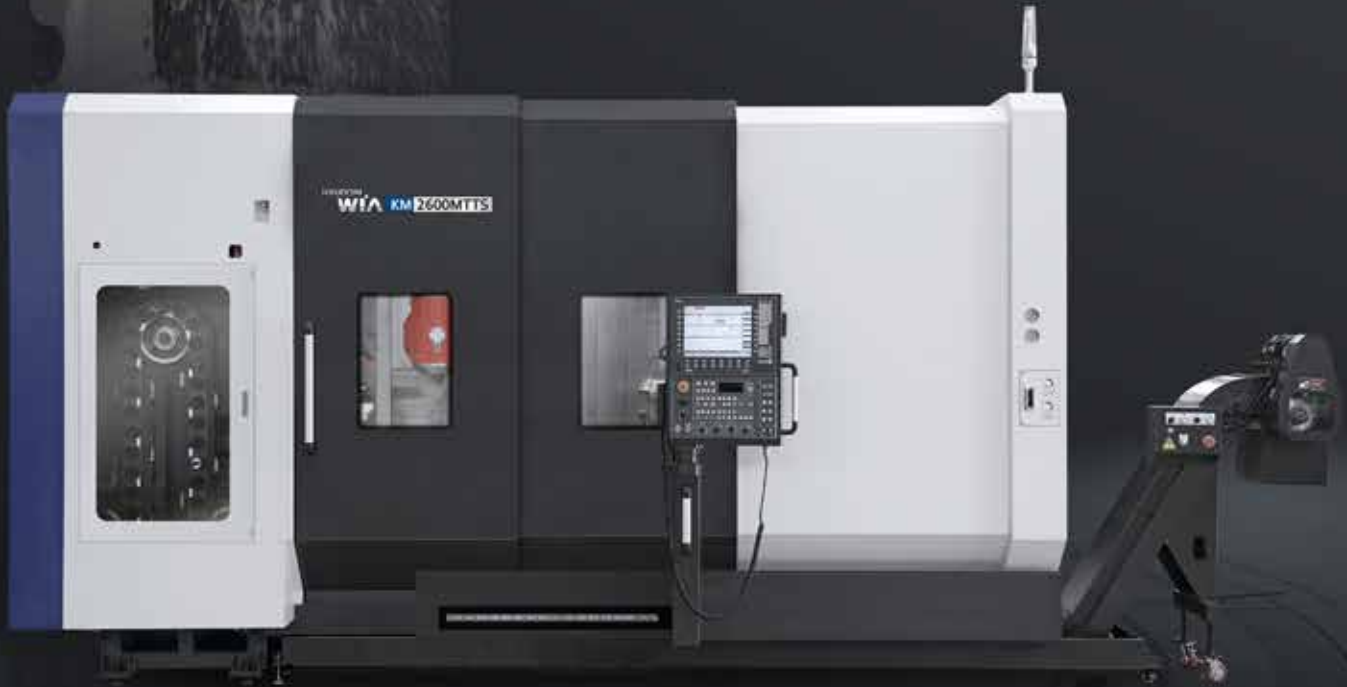

## Process-intensive 9-axis Multi-tasking Machine

The multitasking machine KM2600MTTS, designed by HYUNDAI WIA with years of expertise and the latest technology, is designed to maximize productivity by utilizing twin spindles and mill head.

# MULTITASKING MACHINE




## Main & Sub Spindle

Built-in Motor  
10"  
4,000 r/min



## Mill Head

Built-in Motor  
CAPTO C6  
12,000 r/min




## Lower Turret

BMT65P  
□ 25/Ø40 (□ 1"/Ø1.6")  
5,000 r/min

## Productivity Enhanced by Main & Sub Simultaneous and Balanced Cutting Capability


### Simultaneous Machining

The KM2600MTTS is equipped with 1st & 2nd spindles for simultaneous cutting, dramatically enhancing productivity.

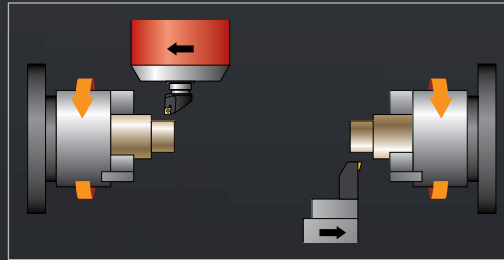

### Balanced Machining


The Mill Head and Lower Turret enable balanced cutting, thereby shortening the cutting time and enabling high-speed, precision machining.

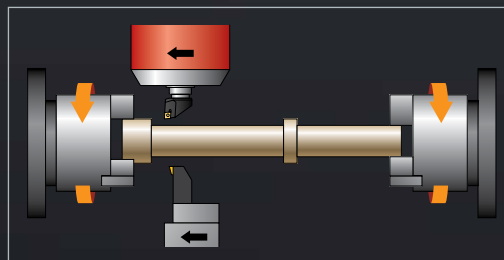




# Applications & Parts

VACUUM PUMP  
ROTOR



IMPELLER



Mounting  
SHELL



ARTIFICIAL  
BOPE



HOUSING,  
ELECTRIC MOTOR



BLADE,  
COMPRESSOR



HOUSING,  
ENGINE




CRANKSHAFT



01  
KM2600MTTS

## Basic Features

Process-intensive 9-axis Multi-tasking Machine with the Mill Head, 2 Spindle & Lower Turret

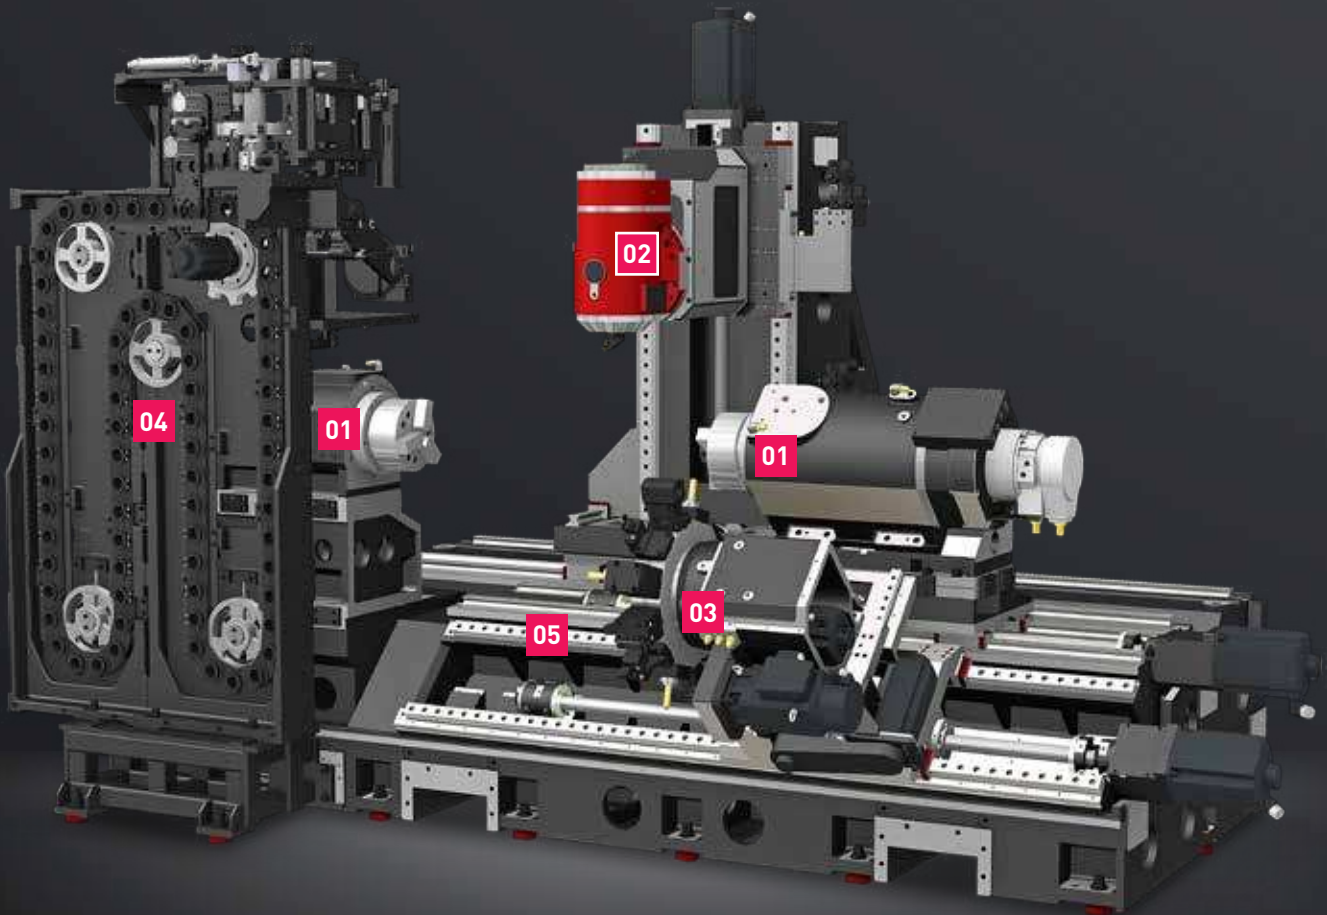


### High-rigidity Construction with High Aging Resistance

- The adoption of a milling head with a built-in B axis (0.0001control) enables the operator to perform turning and milling works in perfect harmony.
- The highly rigid Y-axis structure makes it possible to process diverse shapes.
- Application of CAPTO C6 tool for high speed complex machining
- The model features built-in main & sub-spindles with high output and high torque.

# Basic Features

## 01 Built-In 10" Main & Sub Spindle


The built-in 4,000rpm-class spindle minimizes vibration to allow machining of the highest precision.

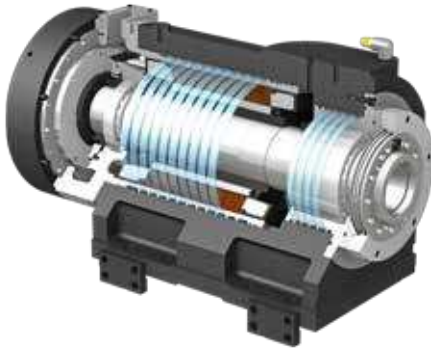

## 02 Mill Head


The mill head of KM2600MTTS, where the b-axis control can be done, is mounted with a high-resolution encoder having a DDM (Direct Drive Motor) and 0.0001° to secure high positioning precision. This shows the highest machining performance among the same class.

<12,000 r/min>




## 03 BMT Lower Turret

The lower turret ensures the high-speed machining of complicated shapes in precision only with the one-time setting of an object to be machined with the mill head and complex machining.

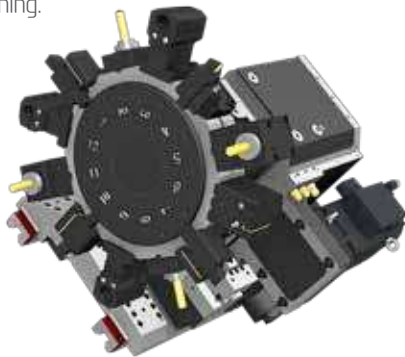

## 04 ATC & Magazine


The installation of magazine on the front provides the efficient tool exchange and tool setting. Magazine with chain driving method provides 36 tools as a standard, and 72 tools as an option.

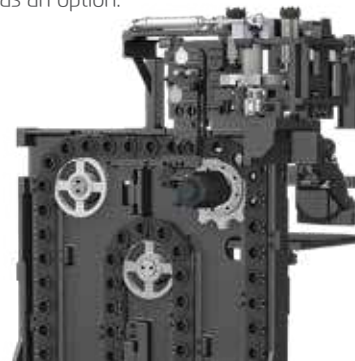

## 05 High Precision, High Rigidity Bed Structure

Z-axis in a 3-way structure is applied to remove any interference in conveyance between the tool station and 2nd spindle. Design in 45° slant ensures that cutting chips and cutting oil are discharged smoothly and both high strength and high precision can be maintained.


Especially, the bed is analyzed in the FEM method to minimize factors that can be generated in the machining, such as thermal deformation, vibration, etc.

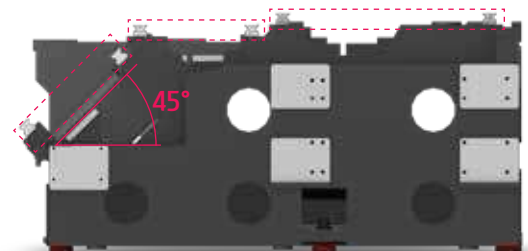

**02**  
KM2600MTTS

# Slideway Features

High-Precision & Speed Multitasking Machine

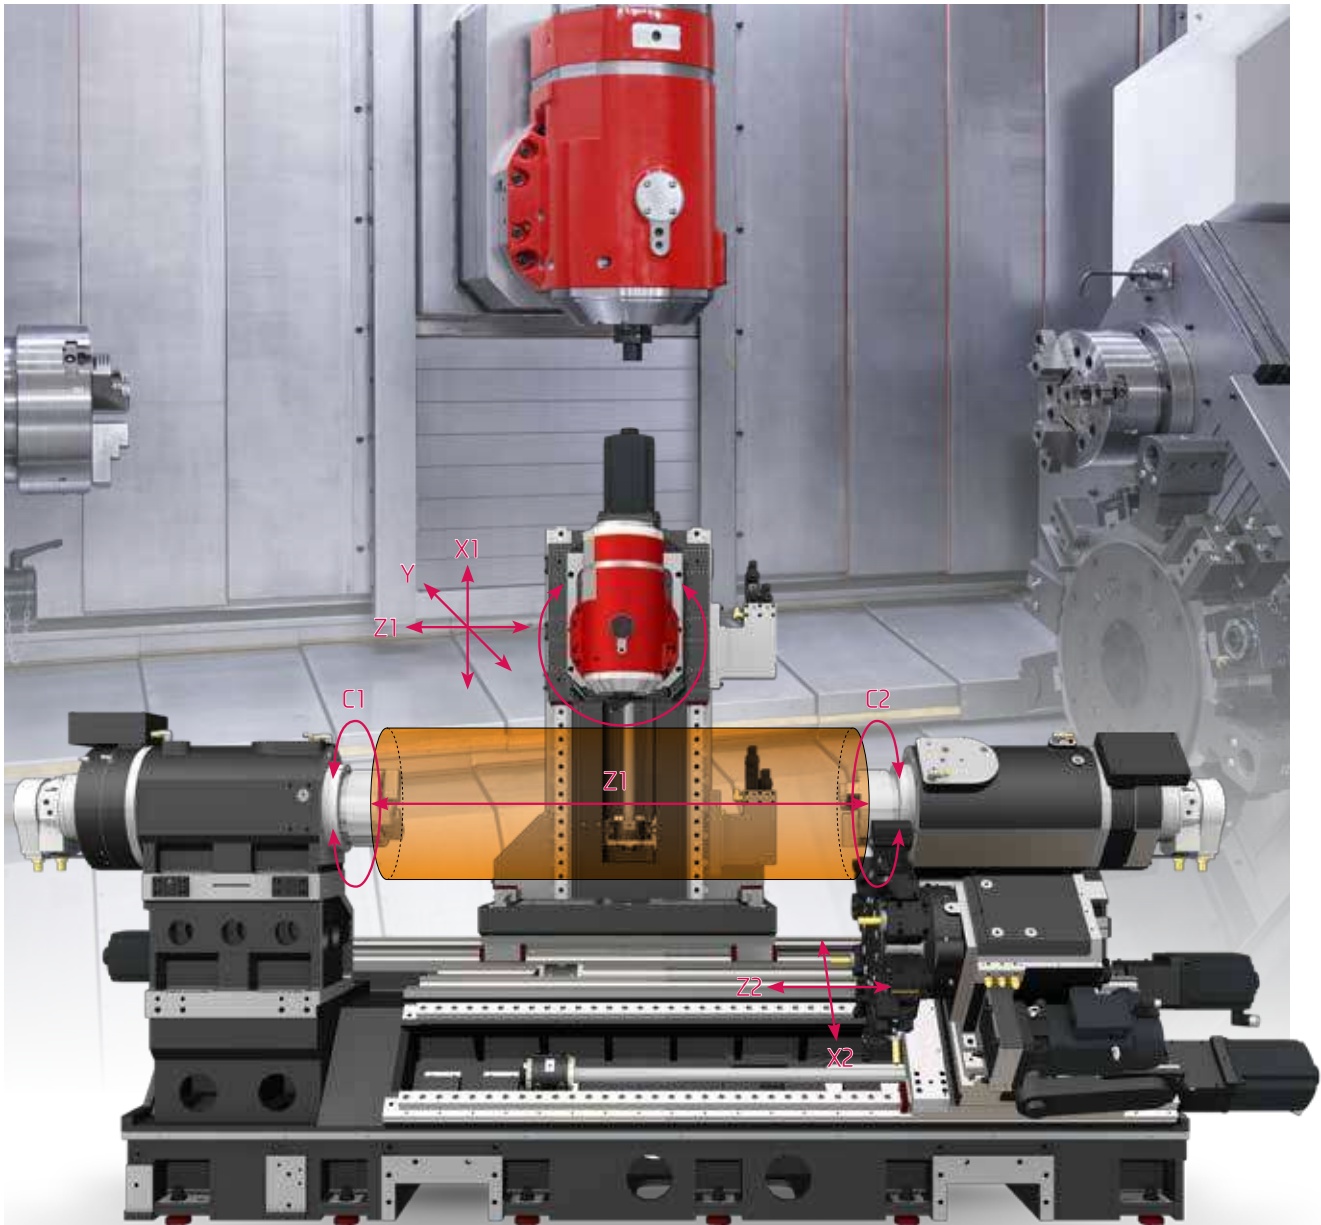


705/1,595/250/250/1,500/1,586 mm (27.8"/62.8"/9.8"/9.8"/59"/62.4")  
Travel (X1/Z1/Y/X2/Z2/ZB)

40/40/40/30/20/15 m/min (1,575/ 1,575/ 1,575/1,181/787/591 ipm)  
Rapid Traverse Rate (X1/Z1/Y/X2/Z2/ZB)




## Cross Type Y-axis

The cross type Y-axis ensures the excellent positioning precision with the simple preparation and correction of program, which will give you a great help in increasing productivity.



## Wide Machining Range of Y Axis

The adoption of a Y-axis with a wide cutting range of 250mm(9.8") allows Y-axis cutting in a single step without having to rotate the C-axis, and improves the cutting pitch and precision level.

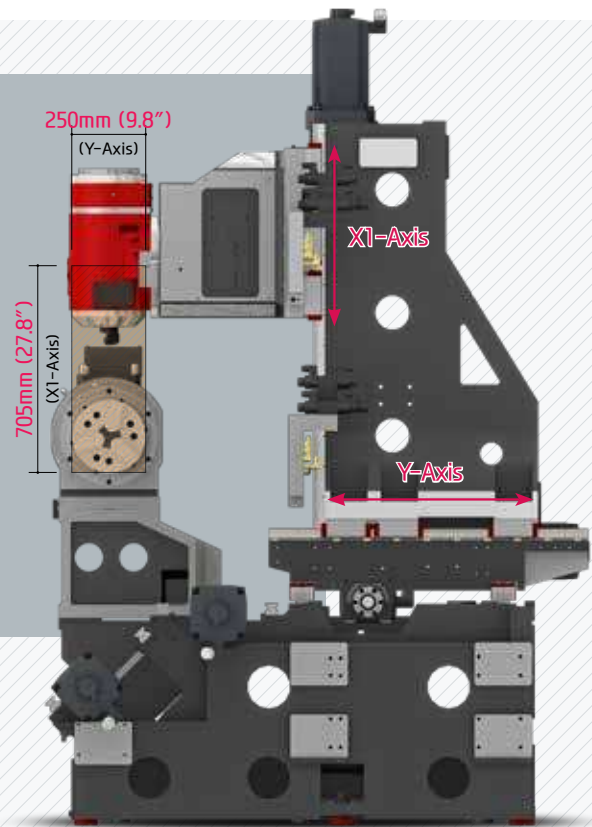

## High-Speed Roller LM Guideway

Linear roller guideways are applied to reduce non-cutting time and bring high rigidity.



## Forced Cooling System for Ball Screw

The KM2600MTTS's Ball Screw features a forced cooling system that uses Oil Con. The system is ideal for high-precision machining due to its ability to considerably reduce the feed shaft's thermal displacement generated by repetitive movements.

In addition, the ball screw's diameter has been increased to endure the load imposed during heavy-duty cutting.



## High-Precision Linear Scale **OPTION**

KM2600MTTS is equipped with linear scales on all axes providing high precision positioning accuracy and compensates for ball screw thermal displacement ensuring extremely precise machining.

In addition, the **absolute type linear scale** is installed in close proximity to the ball screw of each axis. During operation an added benefit is not being require to home the machine.

**n3**  
KM2600MTTS

# High-Precision Spindle


Long Lasting High Accuracy & Excellent Performance  
Multitasking Machine



## High-precision Built-in Spindle delivers impressive performance in accurate machining

Built-in type spindle reduces noise, heat and vibration effectively at high speed rates. Also, rapid acc./deceleration reduces non-cutting time leading to higher productivity.

- Bar Capacity :  $\varnothing 80$  ( $\varnothing 3.1''$ )
- Spindle Bore :  $\varnothing 91$  ( $\varnothing 3.6''$ )
- C-axis Indexing :  $0.0001^\circ$

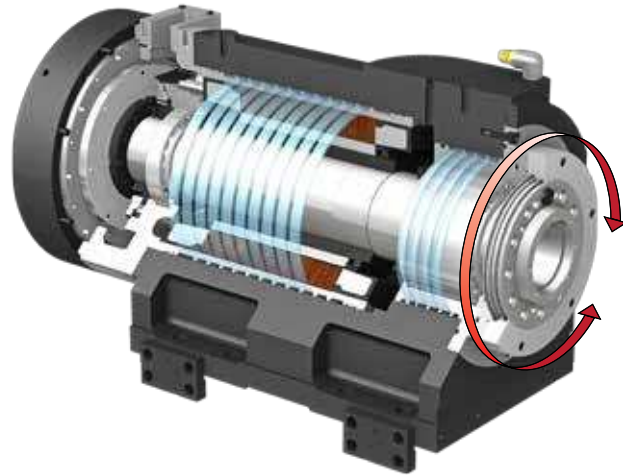


### C-Axis Control

C-axis control of main and sub spindle allows machining of various products with the use of mill head on the Y-axis.

### Spindle Oil Cooling


The main/sub spindles have been fitted with cooling units as a standard feature to minimize thermal displacement generated during cutting works, maintain a constant temperature, and increase cutting stability.

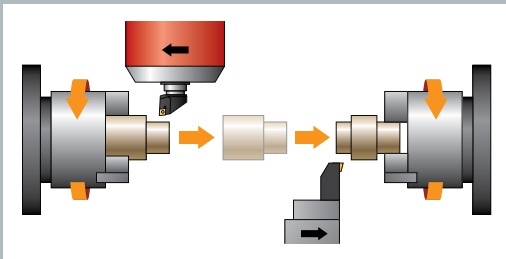


### Easy Work Coordinate Setting

The 10" chuck has been adopted for the built-in sub-spindle as well as the main spindle. Synchronized rotation of the main and sub-spindles allows high-precision, continuous cutting work.

### Main Spindle

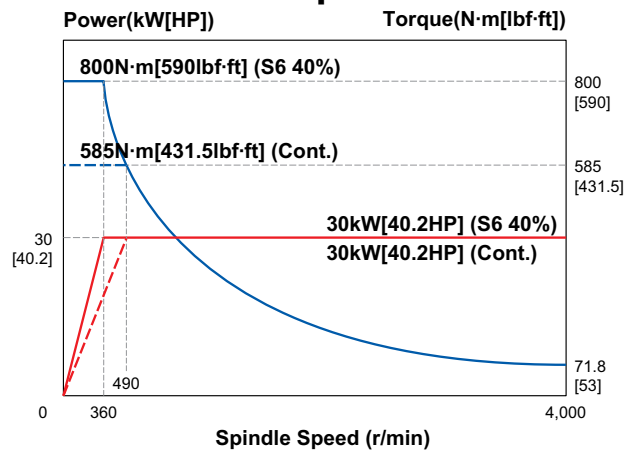

### Sub Spindle


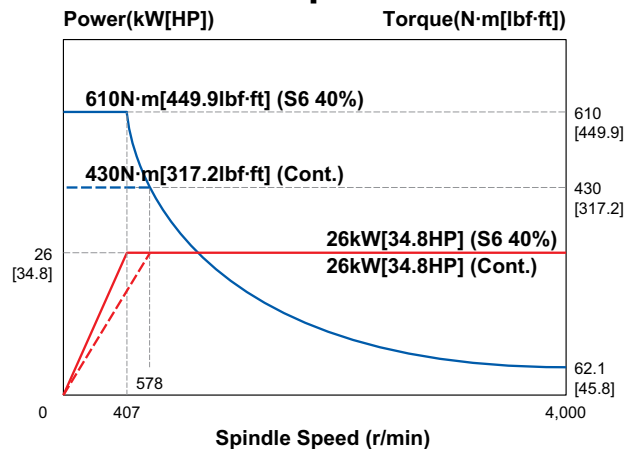


# n4

KM2600MTTS

## Mill Head

Excellent Performance, High Accuracy Cutting  
Multitasking Machine

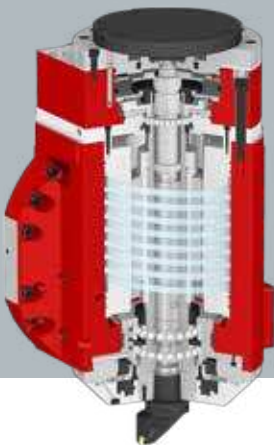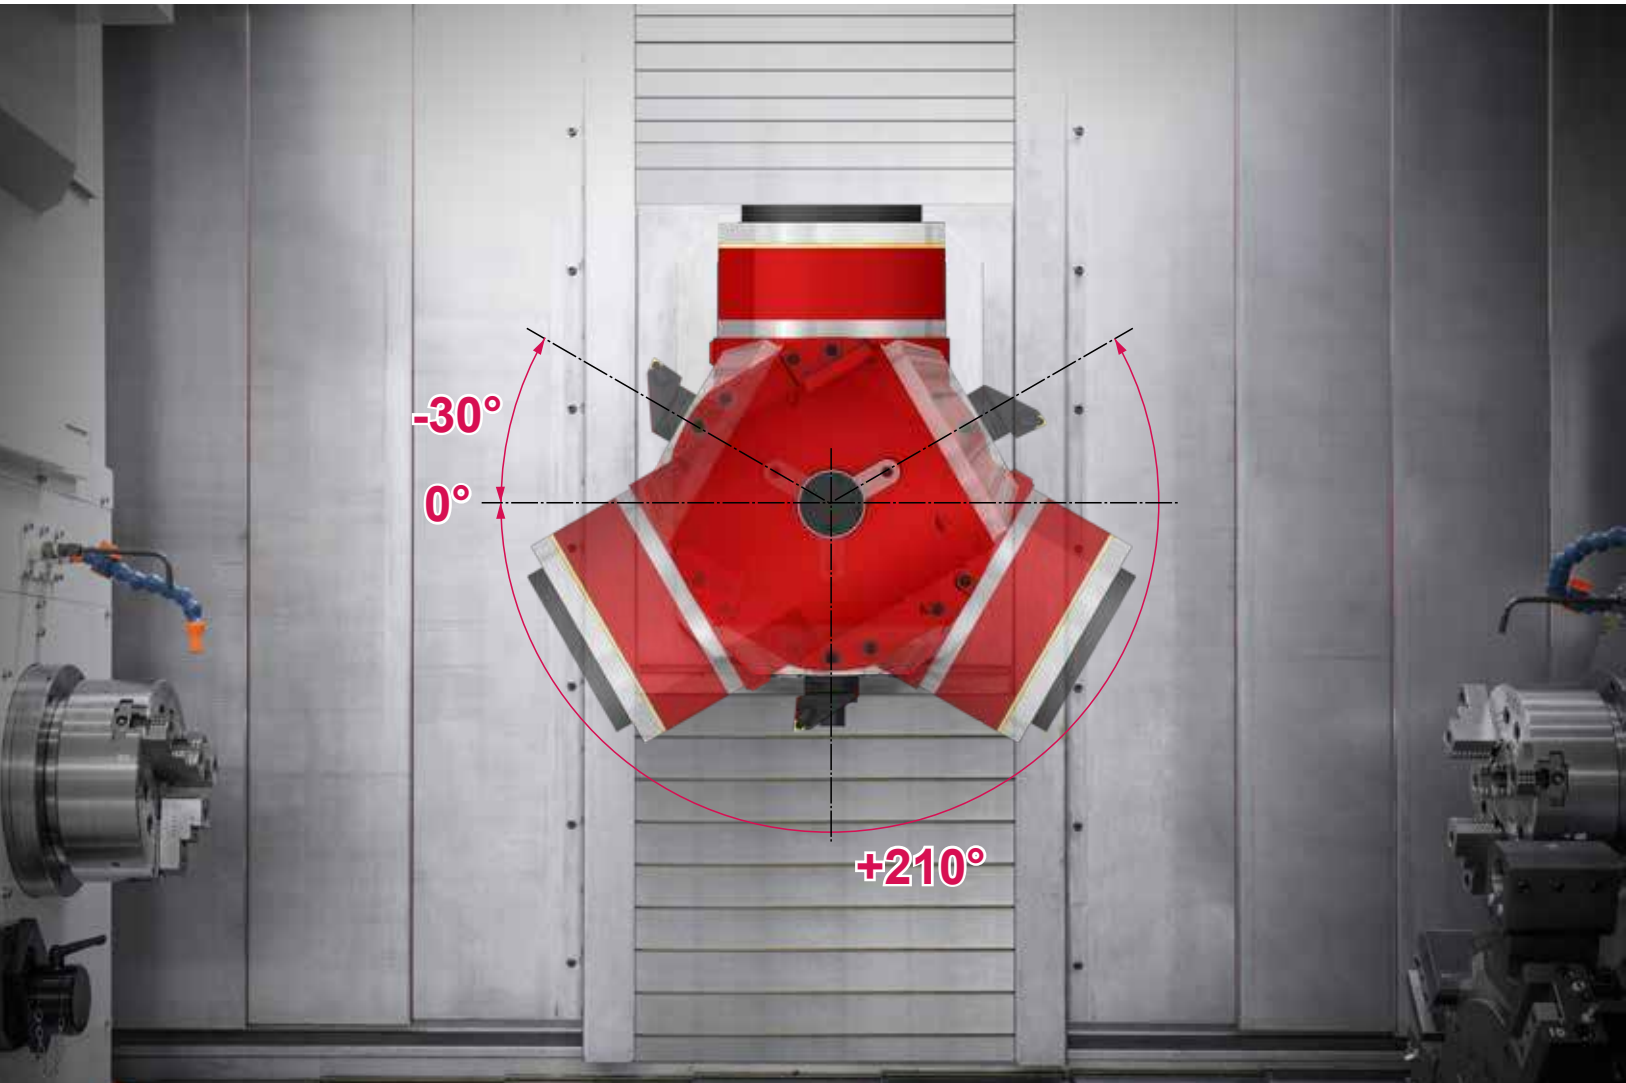

### Oil Cooling


The adoption of a spindle cooling unit for the Mill Head as a standard feature minimizes thermal error generated during cutting work, maintains a constant temperature, and increases cutting stability.

- ◉ B-axis Angle : **240°** (-30°~+210°)
- ◉ B-axis Indexing Angle : **0.0001°**
- ◉ Driven Type : **DD Motor**

## High-precision B Axis Mill Head for Various Cutting Works and Wider Range of Machining

The Mill Head features high-precision B-axis control capability, and is equipped with a Direct Drive Motor and a 0.0001° class high fidelity encoder to guarantee high positioning accuracy and the best cutting performance in its class.

Maximum rotation of 12,000rpm enables high-speed cutting and superb machining performance.

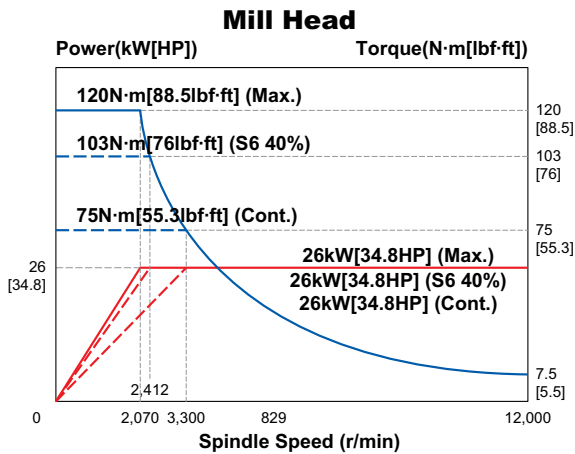


### CAPTO-C6

CAPTO-C6, which allows double-sided circulation, is applied as a standard for maximum cutting capability.

- Ideal over load analysis
- Decreased tool change time by short taper

## Machining Variation

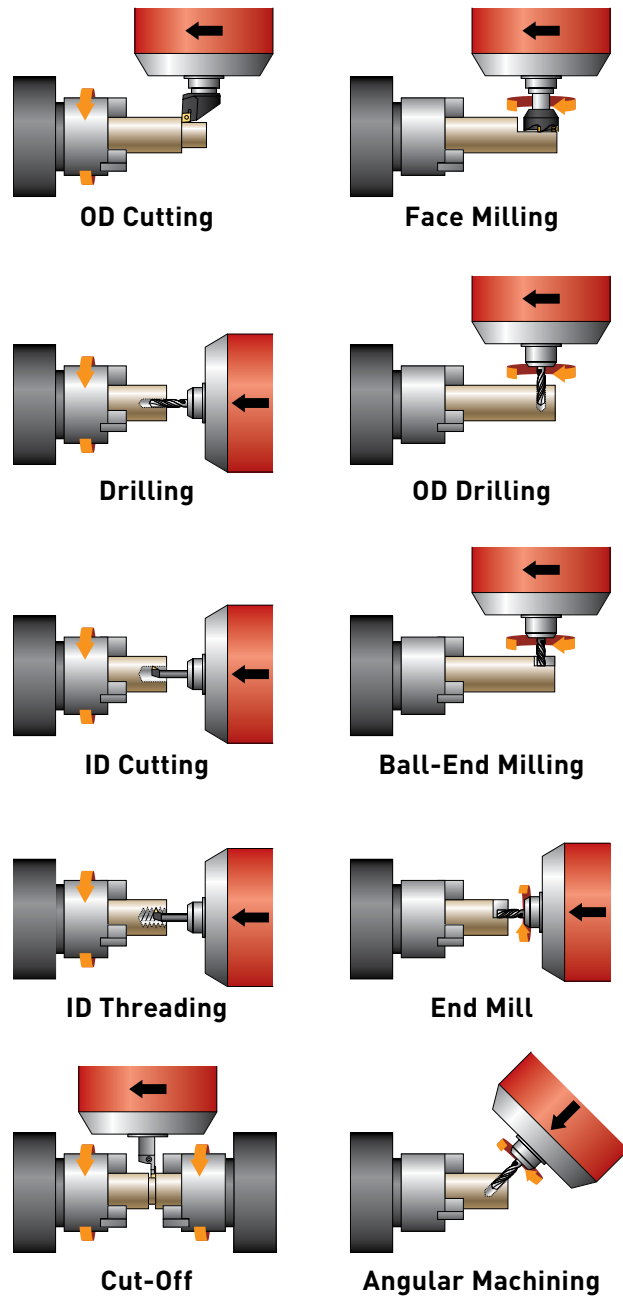

**05**  
KM2600MTTS

# BMT Lower Turret


High speed, High Accuracy, Highly Reliable  
BMT Turret



# BMT Turret

## BMT Turret

The lower turret ensures the high-speed machining of complicated shapes in precision only with the one-time setting of an object to be machined with the mill head and complex machining.

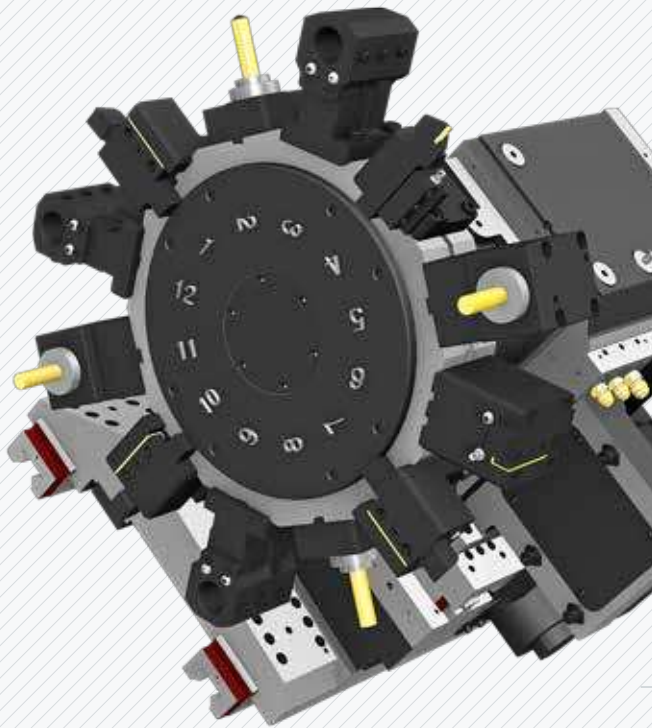

- ⦿ Output(Max.) : **3.3 kW (4.4 HP)**
- ⦿ Speed(rpm) : **5,000 r/min**
- ⦿ Collet size : **Ø20 (0.8") (ER32)**
- ⦿ Live Tool Type : **BMT65P**
- ⦿ Indexing Time : **0.2 sec/step**

Straight Milling Head




Angular Milling Head




## Mill Tool Holder

Machining capability has increased with the addition of straight milling head tool holder, which can machine workpieces from the side, and angular milling head tool holder, which can perform I.D. operations.

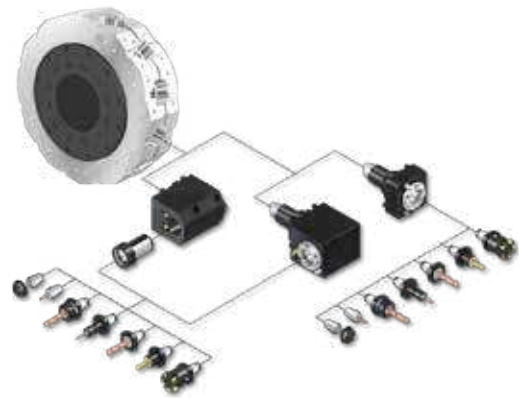

## Turn Mill

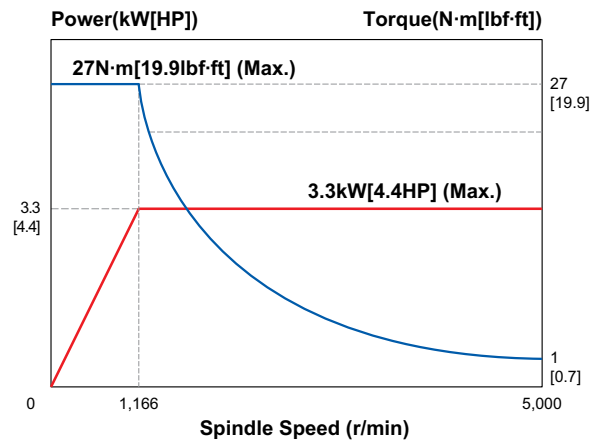

n6  
KM2600MTTS

## Special Tool Holders

Various Driven Precision Tool holders for  
Multitasking Machine








## BMT Tooling System

The KM2600MTTS can process high value-added products using a variety of rotating tools. In particular, there is a multi-holder for attaching a variety of tools to one holder, and an eccentric rotary tool for handling eccentric parts without additional axis travel, which can realize integration of process with one machine.

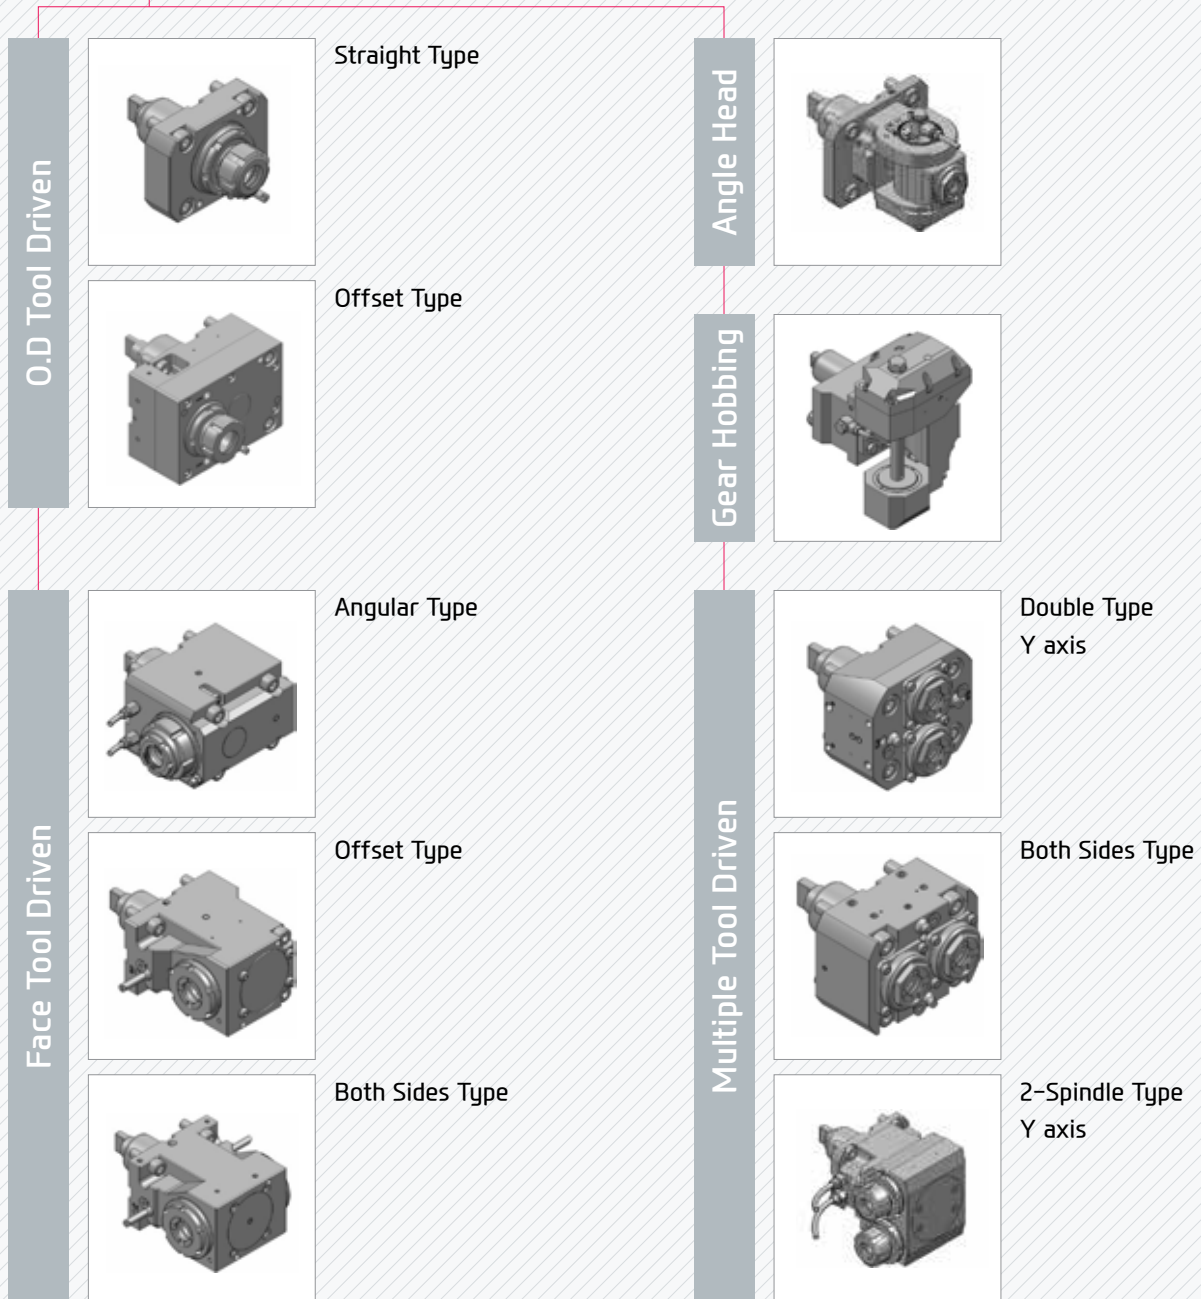

❖ Consultation needed when ordering these options.

07  
KM2600MTTS


iRiS HYUNDAI WIA  
Smart Factory Solution

integrated Revolution of industrial Solution

## iRiS is HYUNDAI WIA's Smart Factory Solution.

iRiS, HYUNDAI WIA's revolutionary smart factory solution, consists of **Smart Monitoring System** for integrated management of HYUNDAI WIA machines around the world, and the **Smart Machining System** with ease, quality control, productivity and safety of the operator in mind.

## SMART MONITORING

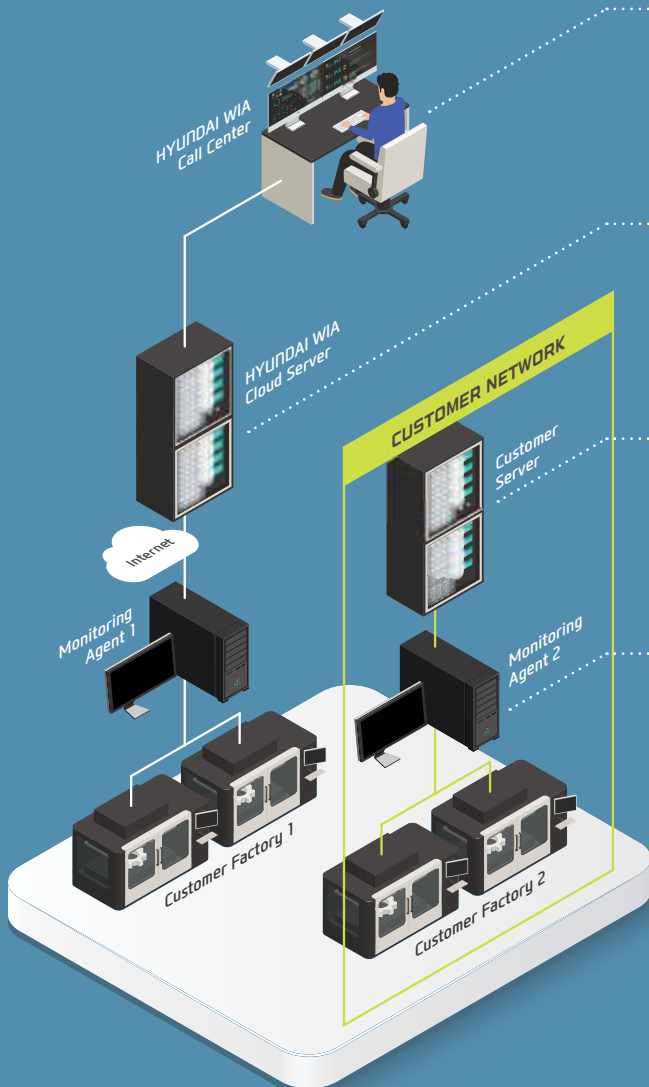

### HW-MMS Remote (Remote service based)

Hyundai Wia Call Center's remote diagnosis service provides a HMI/video diagnostic function.



### HW-MMS Cloud (Cloud server based)

A cloud server-based equipment monitoring system for collecting and analyzing facility operation data.



### HW-MMS Edge (Customer Server Based)

A customer server-based equipment monitoring system for collecting and analyzing facility operation data.



### HW-MMS Collector (Machine data collector)

A dedicated program for collecting CNC data for MES/ERP.

A brand new manufacturing machine by Hyundai Wia, HW-MMS is a unique software capable of monitoring the operation status of manufacturing machines in factories, a **smart solution** to improve manufacturing conditions of customers.

## SMART MACHINING



### HYUNDAI WIA SMART SOFTWARE

PC built-in software that offers operation, maintenance, management monitoring and various user friendly features.



### THERMAL COMPENSATION

Software that measures the changes in the external environment as well as heat emission during processing to help reduce thermal displacement.




### MAGAZINE MAINTENANCE

ATC MAGAZINE maintenance support screen and user convenience function



### SOFT MCP

MANUAL operation of equipment function & Check function operation test in JOG MODE

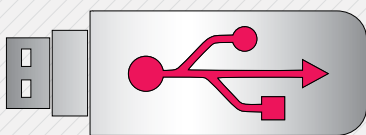

### USB Port


Convenience is increased when inputting and outputting program. The USB port is available in addition to the former input output methods such as CF memort card and LAN.

# n9

KM2600MTTS

## User Convenience

Various Devices for User Convenience

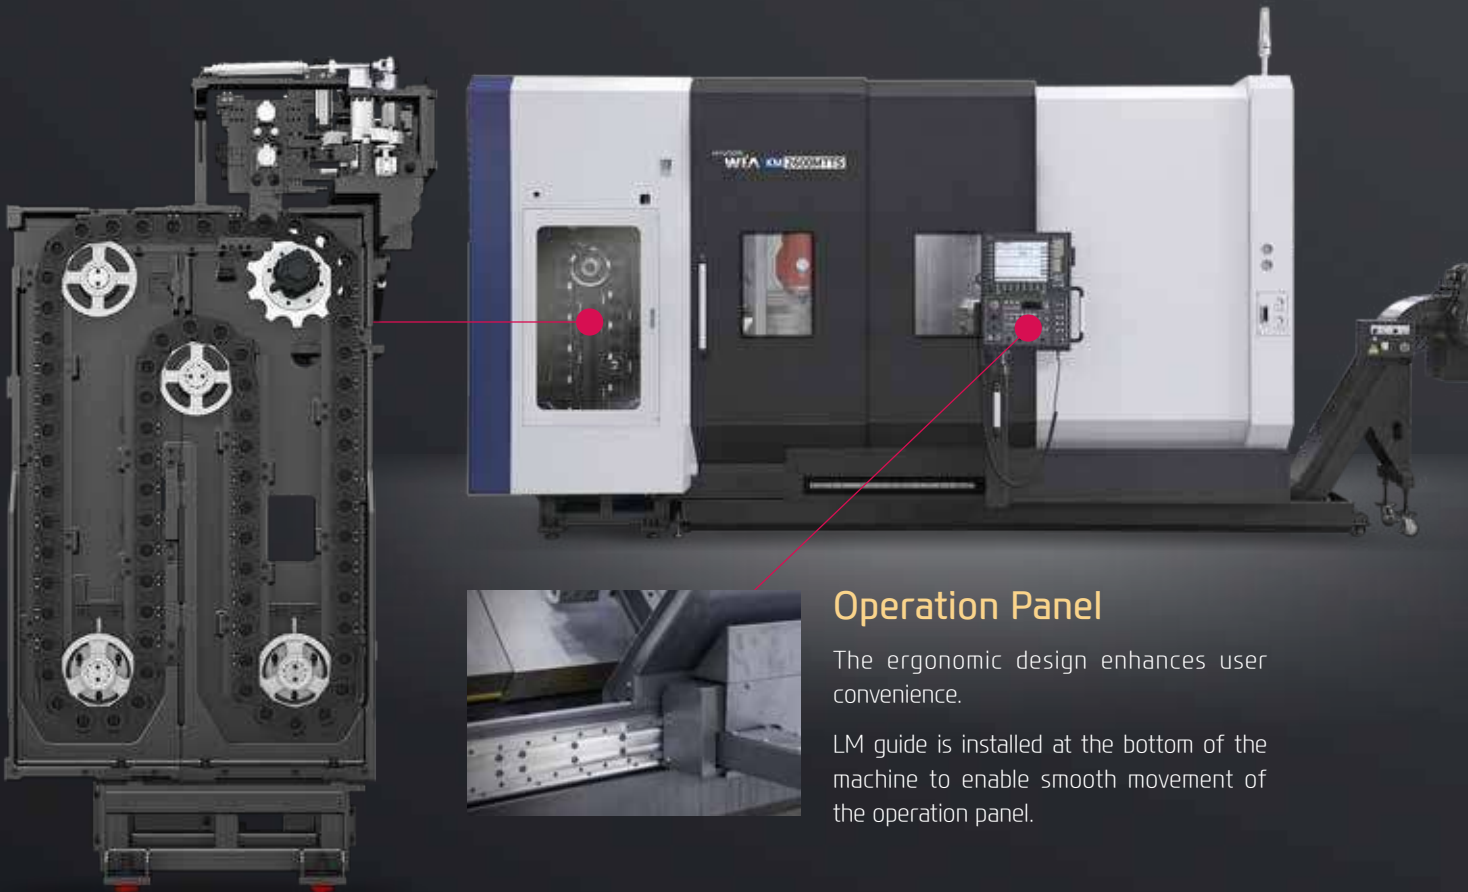

### Operation Panel

The ergonomic design enhances user convenience.


LM guide is installed at the bottom of the machine to enable smooth movement of the operation panel.

### ATC & Magazine


The installation of magazine on the front provides the efficient tool exchange and tool setting. Magazine with chain driving method provides 36 tools as a standard, and 72 tools as an option.

ATC driven by a servo motor increases the positioning precision and control capability due to its tool exchange method in the cam index type.

- No. of Tools : **36 [72]** EA   ● Max. Tool Weight : **8 kg (17.6 lb)**
- Max. Tool Dia. (W.T/W.O) : **Ø90/Ø125 (Ø3.5"/Ø4.9")**
- Max. Tool Length : **400 mm (15.7")**
- Tool Selection Method : **Fixed Address**

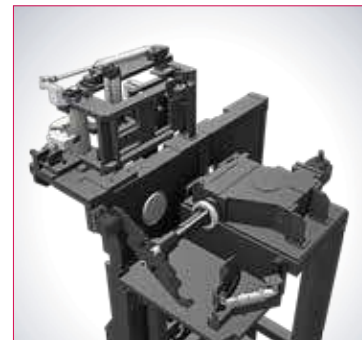

# The KM2600MTTS offers Ergonomic Design for Easy Operability and Maintenance.

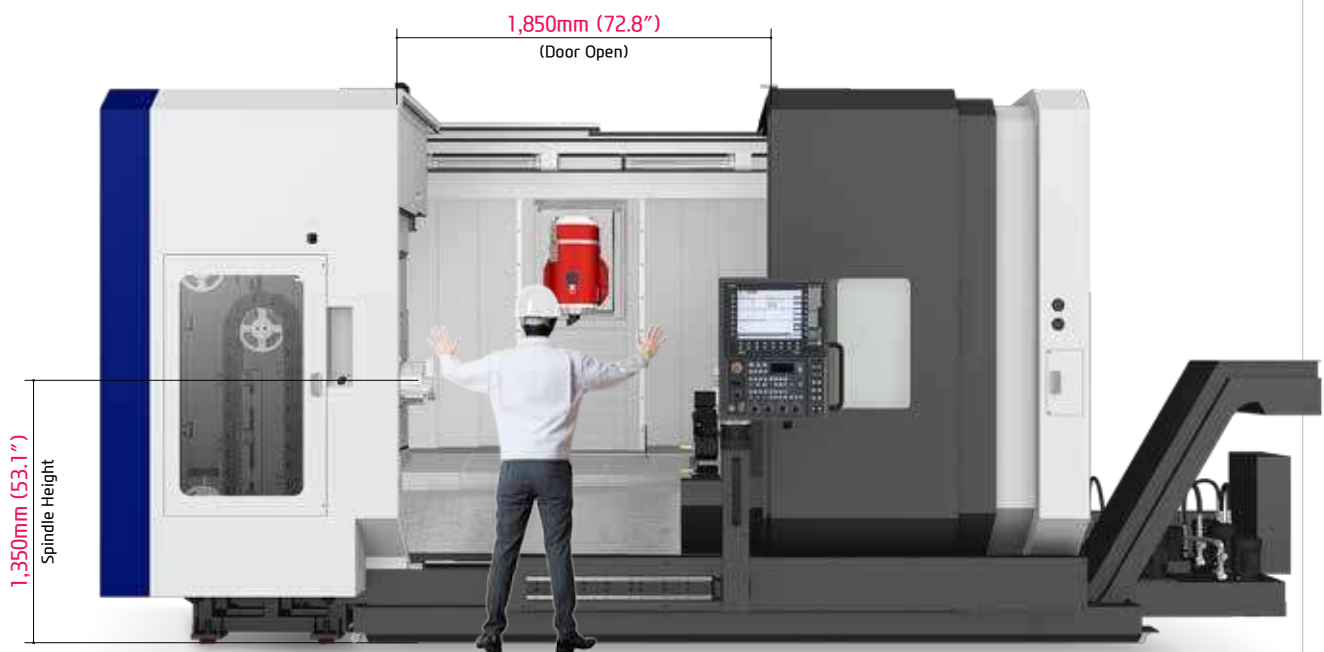


## Improved Access with Larger Front Door

The adoption of a larger front door makes crane access for cutting preparation works, such as setting up workpieces, much easier.

## Highly Accessible Spindle

The spindle's ergonomic design improves access for the chuck and makes it easier to set up workpieces.

The height from the floor to the center of the spindle has been carefully considered in order to improve the operator's convenience when setting up work pieces.

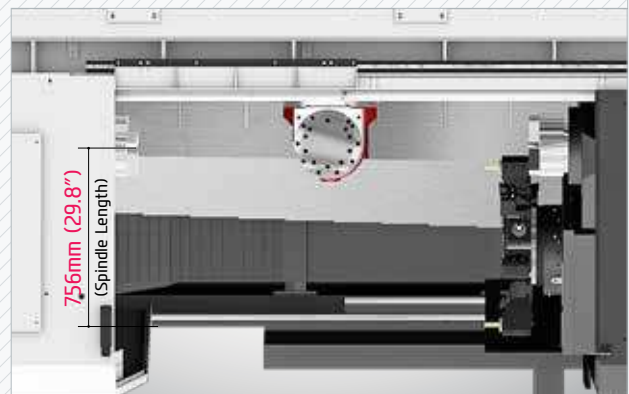

# SPECIFICATIONS

## Standard & Optional

● : Standard ○ : Option ☆ : Prior Consultation



Spindle		KM2600MTTS
Main Spindle		●
Hollow Chuck 3 Jaw	10"	●
Main Spindle	10"	○
Solid Chuck 3 Jaw		○
Sub Spindle		●
Hollow Chuck 3 Jaw	10"	●
Sub Spindle		○
Solid Chuck 3 Jaw	10"	○
Standard Soft Jaw (1set)		●
Chuck Clamp Foot Switch		●
2 Steps Hyd. Pressure Device		☆
Spindle Inside Stopper		☆
Chuck Open/Close Confirmation Device		●
Chuck Pressure Check Switch		●
Cs-Axis (0.001°)		●
<b>Mill Head</b>		
Tool Shank Type	CAPTO C6	●
<b>ATC &amp; Magazine</b>		
ATC Extension	36 Tool	●
	72 Tool	○
<b>Turret</b>		
Tool Holder	12EA	●
	24EA	○
Mill Turret	BMT	●
Straight Milling Head (Radial)	Adapter Type,2ea	●
Angular Milling Head (Axial)	Adapter Type,2ea	●
Boring Sleeve		●
Drill Socket		●
U-Drill Holder		○
U-Drill Holder Sleeve		○
Angle Head		☆
<b>Tail Stock &amp; Steady Rest</b>		
Lower Tool Mount Steady Rest (SLU2)		○
<b>Coolant &amp; Air Blow</b>		
Standard Coolant (Mill Front)		●
Chuck Coolant (Upper Chuck)		○
Gun Coolant		○
Shower Coolant (Bed Flushing)		●
Through Spindle Coolant (Only for Special Chuck)		☆
Thru Coolant for Live Tool		☆
Chuck Air Blow (Upper Chuck)		●
Sub Spindle Air Blow		●
Turret Air Blow		☆
Air Gun		○
Through Spindle Air Blow (Only for Special Chuck)		☆
High-pressure Coolant	2.0Mpa	○
	7.0Mpa	○
Power Coolant System (For Automation)		☆
Coolant Chiller		☆
<b>Chip Disposal</b>		
Coolant Tank	600 ℓ (158.5 gal) Side	●
Chip Conveyor (Hinge/Scraper)	Front (Right)	○
Special Chip Conveyor (Drum Filter)		☆
Chip Wagon	Standard (180 ℓ [47.5 gal])	○
	Swing (200 ℓ [52.8 gal])	○
	Large Swing (290 ℓ [76.6 gal])	○
	Large Size (330 ℓ [87.2 gal])	○
	Customized	☆

Safety Device		KM2600MTTS
Total Splash Guard		●
Chuck hydraulic pressure maintenance interlock		●
<b>Electric Device</b>		
Call Light	1Color : ●	○
Call Light	2Color : ● ●	○
Call Light	3Color : ● ● ●	●
Call Light & Buzzer	3Color : ● ● ● B	○
Electric Cabinet Light		○
Remote MPG		●
Work Counter	Digital	○
Total Counter	Digital	○
Tool Counter	Digital	○
Multi Tool Counter	Digital	○
Electric Circuit Breaker		○
AVR (Auto Voltage Regulator)		☆
Transformer	60kVA	○
Auto Power Off		○
<b>Measurement</b>		
Q-Setter	Removable	○
Work Close Confirmation Device	TACO	○
(Only for Special Chuck)	SMC	○
Tool Length Measuring Device	Touch(Mill Head)	○
Automatic Workpiece Measuring Device	RMP600	○
HWTM (Tool Monitoring System)		○
Linear Scale	X1/X2 Axis	○
	Z1/Z2 Axis	○
	Y Axis	○
Coolant Level Sensor (Only for Chip Conveyor)		☆
<b>Environment</b>		
Air Conditioner		●
Oil Mist Collector		☆
Oil Skimmer (Only for Chip Conveyor)		○
MQL (Minimal Quantity Lubrication)		☆
<b>Fixture &amp; Automation</b>		
Auto Door		●
Auto Shutter (Only for Automatic System)		☆
Sub Operation Panel		☆
Extra M-Code 4ea		○
Automation Interface		☆
I/O Extension (IN & OUT)	16 Contact	○
<b>Hyd. Device</b>		
Standard Hyd. Cylinder	Hollow	●
Standard Hyd. Unit	45bar (652.7psi) / 20 ℓ (5.3 gal)	●
<b>S/W</b>		
Hyundai WIA Smart Software		●
Thermal Compensation		●
DNC software (HW-eDNC)		○
Machine Monitoring System (HW-MMS)		○
<b>ETC</b>		
Tool Box		●
Customized Color	Need Munsel No.	☆
CAD & CAM Software		☆

# SPECIFICATIONS

## External Dimensions


unit : mm(in)

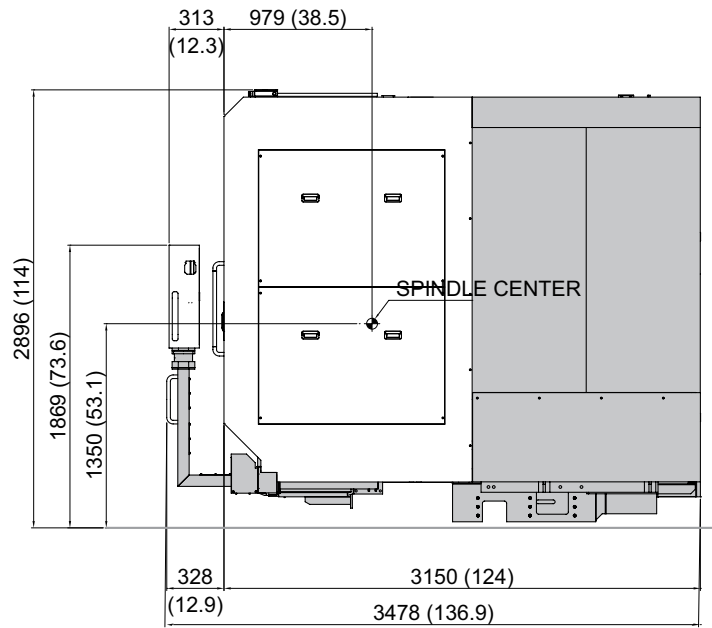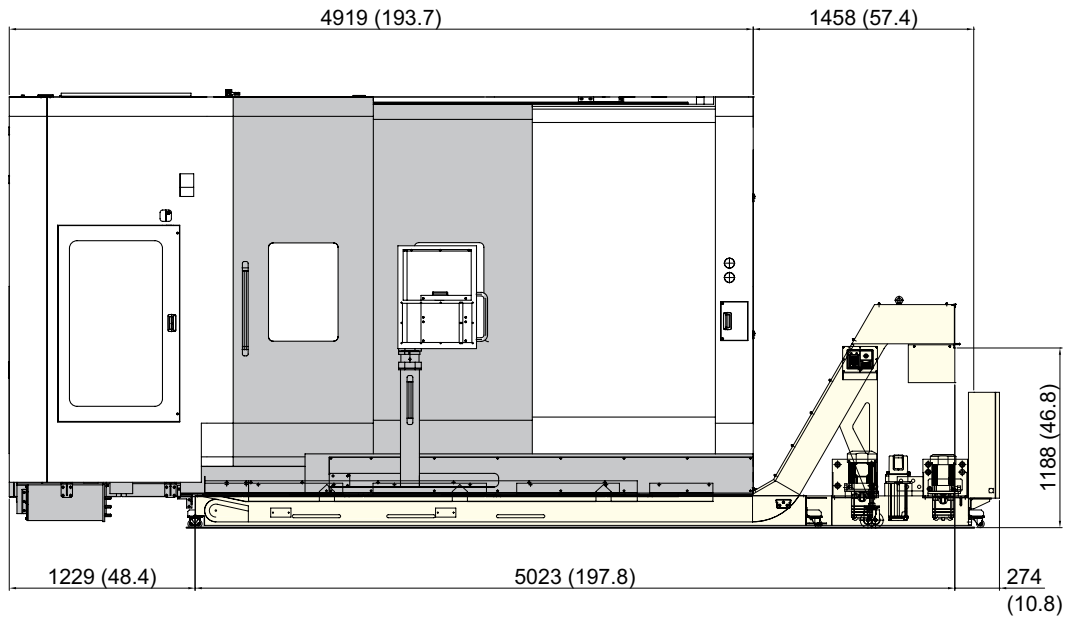

# SPECIFICATIONS

## Interference

unit : mm(in)

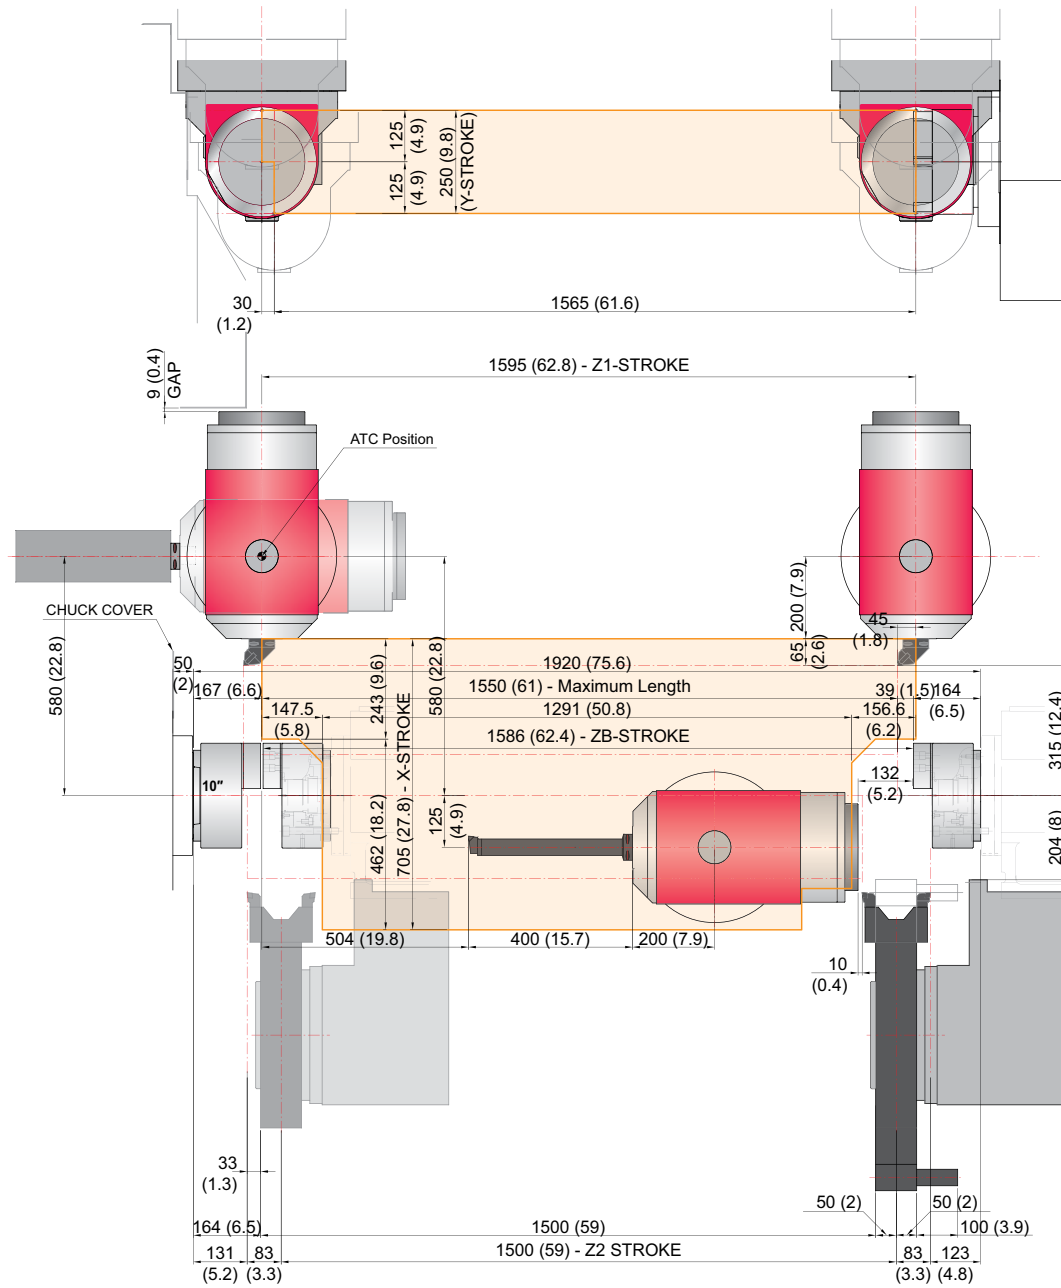




# SPECIFICATIONS

## Interference

unit : mm(in)

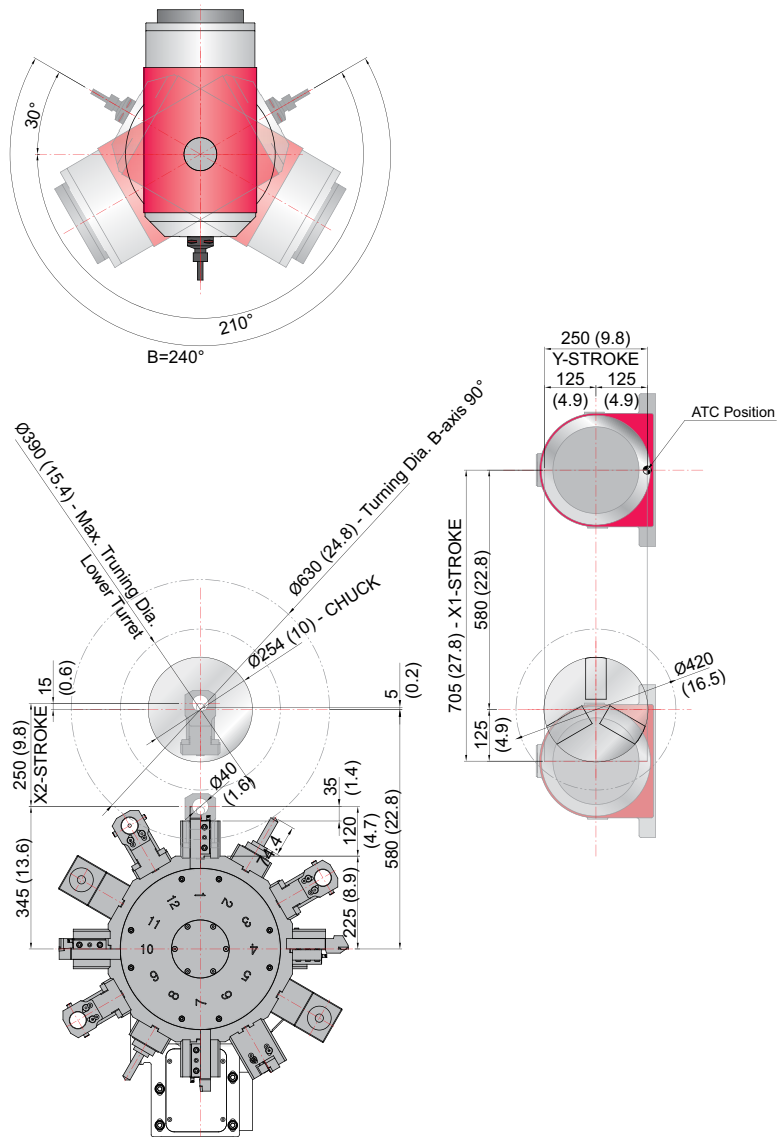


# SPECIFICATIONS


## Tooling Travel Range

unit : mm(in)

### Mill Head 40°

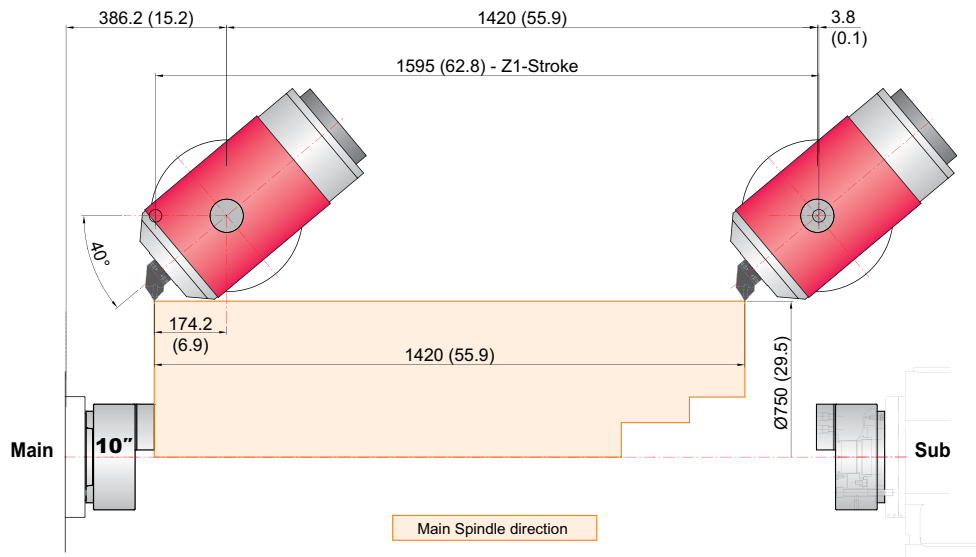

### Mill Head 90°

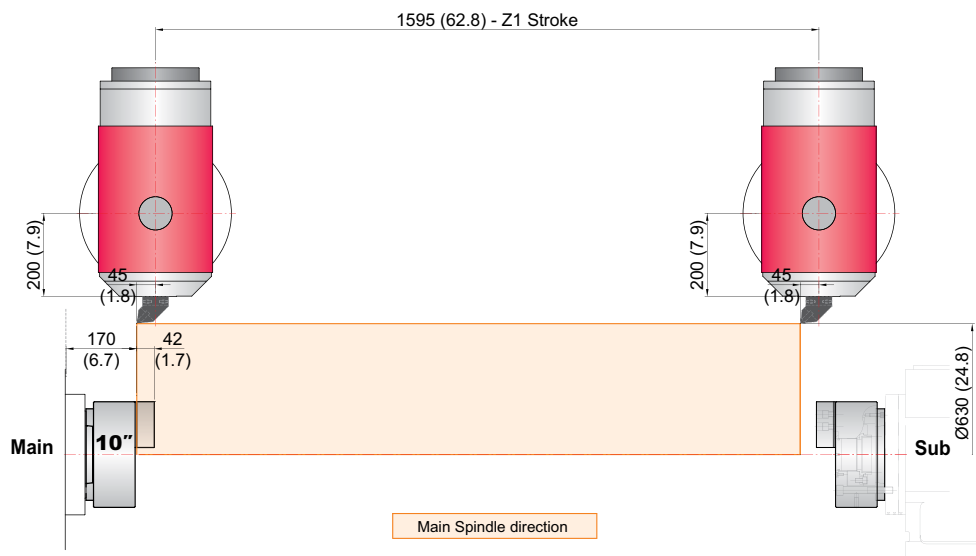


# SPECIFICATIONS


## Tooling Travel Range

unit : mm(in)

### Mill Head 140°

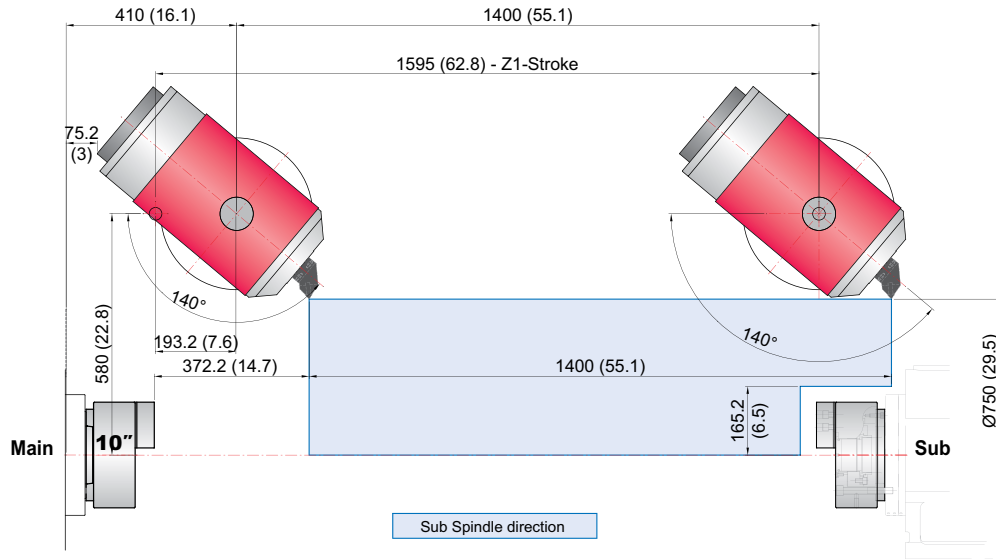

### Mill Head 90°

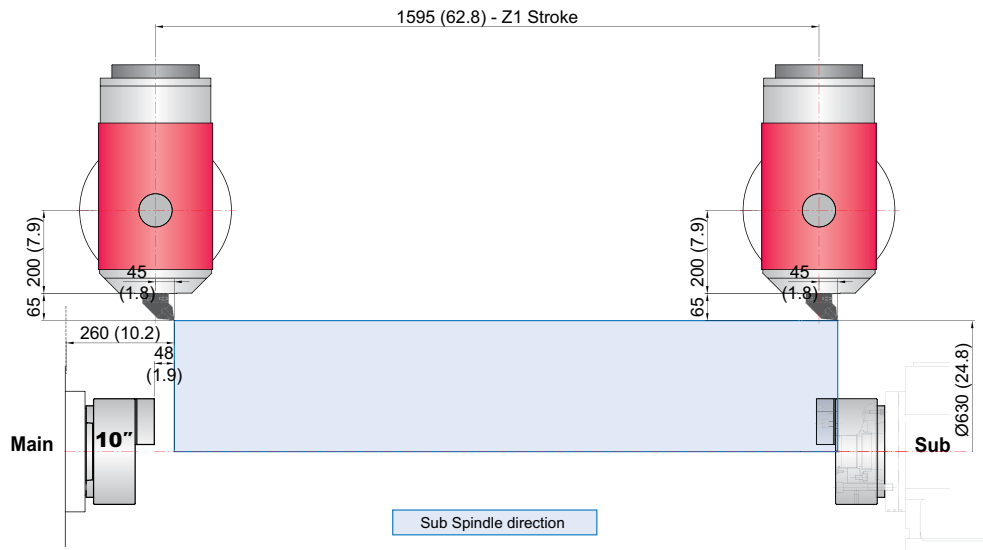


# SPECIFICATIONS


## Tooling Travel Range

unit : mm(in)

### O.D Holder

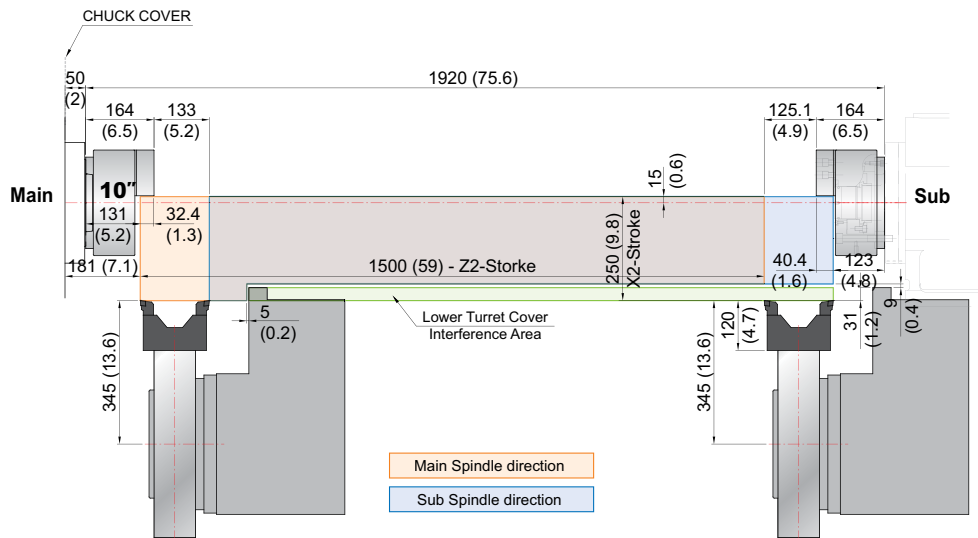

### I.D Holder

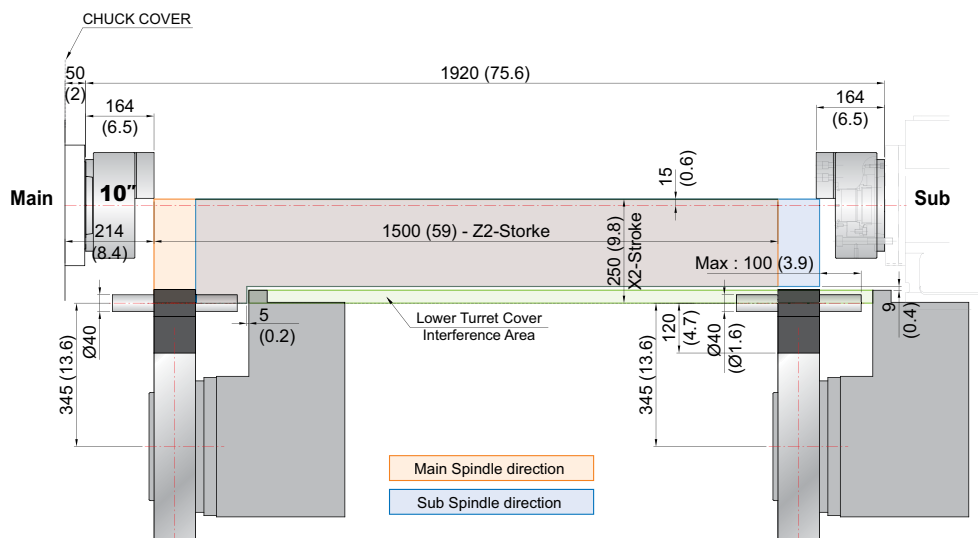


# SPECIFICATIONS


## Tooling Travel Range

unit : mm(in)

### Straight Mill holder

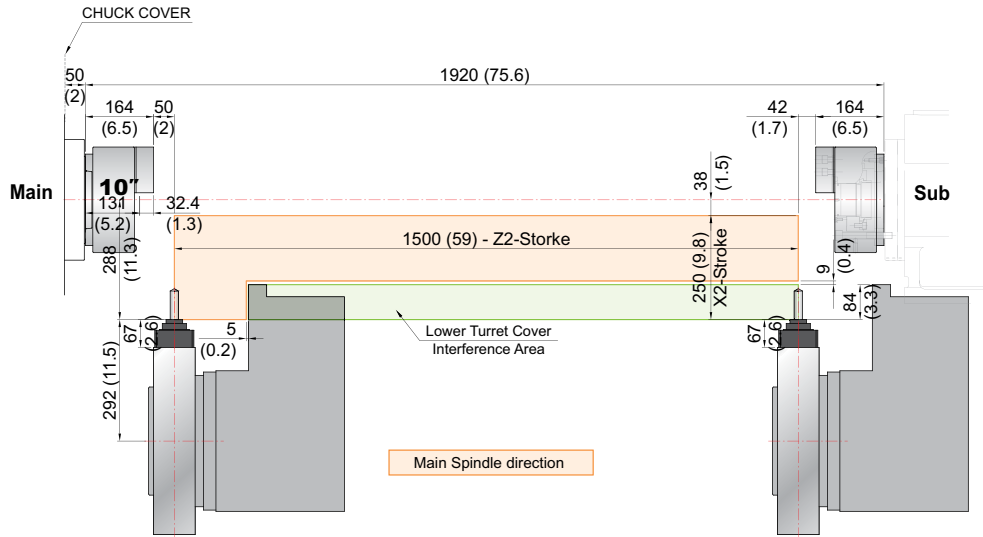


### Angular Mill holder

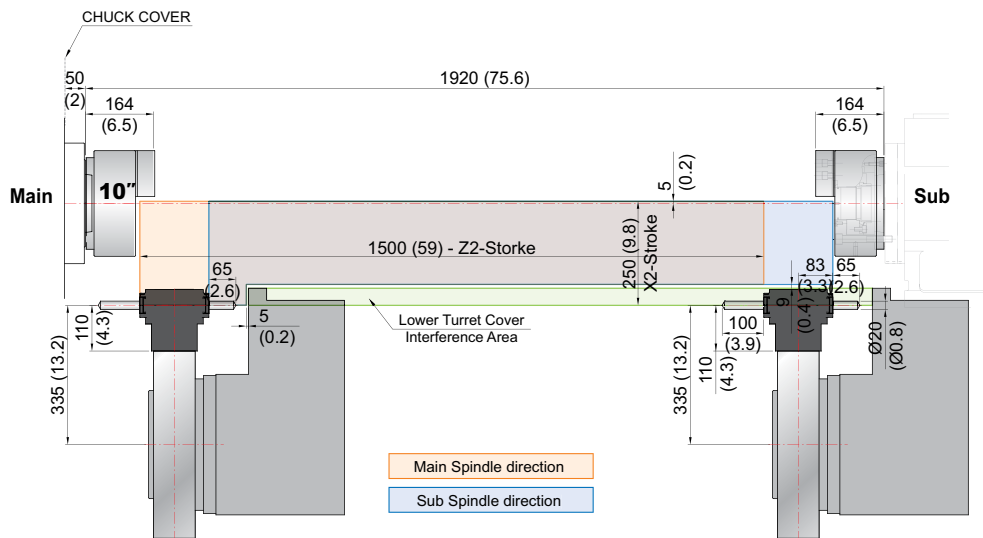

# SPECIFICATIONS

## Tooling System

unit : mm(in)

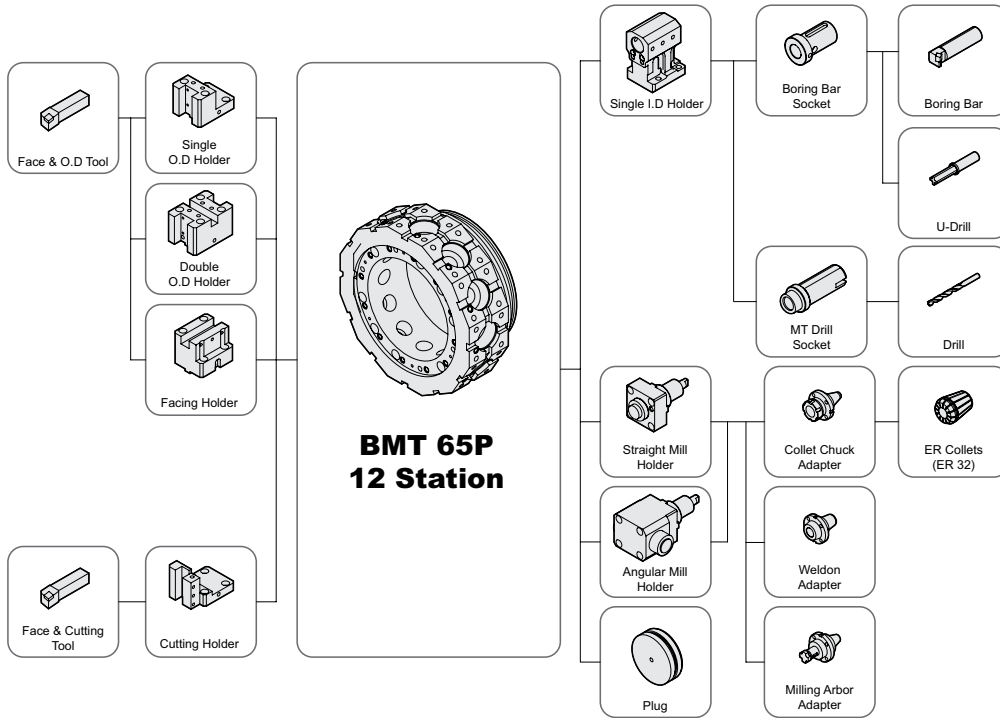

## Tooling Parts Detail

ITEM			KM2600MTTS	
			mm Unit	inch Unit
Turning Holder	O.D Holder	Right/Left	2	2
		Double	1	1
	Facing Holder		1	1
	Cutting Holder		1	1
Boring Holder	I.D Holder	Single	3	3
Driven Holder	Straight Mill Holder	Standard	2	2
		TTC (Tool Through Coolant)	Opt.	Opt.
	Angular Mill Holder	Standard	2	2
		TTC (Tool Through Coolant)	Opt.	Opt.
Socket	Boring	Ø10 (Ø3/8")	1	1
		Ø12 (Ø1/2")	1	1
		Ø16 (Ø5/8")	1	1
		Ø20 (Ø3/4")	1	1
		Ø25 (Ø1")	1	1
		Ø32 (1 1/4")	1	1
	Drill	MT 1	1	1
		MT 2	-	-
		MT 3	-	-
	ER Collet		1 Set	1 Set
Adapter Set		1 Set	1 Set	

# SPECIFICATIONS

## Specifications

[ ] : Option

ITEM		KM2600MTTS	
CAPACITY	Max. Turning Dia. (Mill/Turret)	mm(in)	Ø750(Ø29.5") : B axis 140°, Ø630(Ø24.8") : B axis 90° / 390 (15.4")
	Max. Turing Length	mm(in)	1,550 (61")
	Bar Capacity	mm(in)	Main : Ø80 (Ø3.1") Sub : Ø80 (Ø3.1")
SPINDLE	Chuck Size	inch	Main : 10" Sub : 10"
	Spindle Speed	r/min	Main : 4,000 Sub : 4,000
	Spindle Power (Max./Cont.)	kW(HP)	Main : 30 (40.2) Sub : 26 (34.8)
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	Main : 800/585 (590/431.5) Sub : 610/430 (449.9/317.2)
	Spindle Bore	mm(in)	Main : Ø91 (Ø3.6") Sub : Ø91 (Ø3.6")
	Spindle Driving Methode	-	BUILT-IN MOTOR
	Spindle Nose	-	Main : A2-8 Sub : A2-8
C axis indexing Angle	deg	Main : 0.0001° Sub : 0.0001°	
FEED	Travel (X1/Z1/Y/X2/Z2/ZB)	mm(in)	705/1,595/250(±125)/250/1,500/1,586 (27.8"/62.8"/9.8"(±4.9")/9.8"/59"/62.4")
	Travel (B)	deg	240 (-30° ~ +210°)
	Rapid Traverse Rate (X1/Z1/Y/X2/Z2/ZB)	m/min	40/40/40/30/20/15 (1,575/ 1,575/ 1,575/1,181/787/591)
	Slide Type	-	LM GUIDE
	Y Axis Structure	-	Orthogonal Type
MILL HEAD	Speed	r/min	12,000
	Power (Max./Cont.)	kW(HP)	26 (34.8)
	Torque (Max./Cont.)	N·m(lbf·ft)	120/75 (88.5/55.3)
	Driven Type	-	BUILT-IN MOTOR
	B Axis Indexing Angle	deg	0.0001°
TURRET	No. of Tools	EA	12
	Tool Size (O.D/I.D)	-	□ 25/Ø40 (□ 1"/Ø1.6")
	Indexing Time	sec/step	0.2
LIVE TOOL	Milling Tool Speed (rpm)	r/min	5,000
	Max. Power	kW(HP)	3.3 (4.4)
	Max. Torque	N·m(lbf·ft)	27 (19.9)
	Type	-	BMT65P
ATC	No. of Tools	EA	36 [72]
	Tool Shank Type	-	CAPTO C6
	Max. Tool Dia. (W.T/W.O)	mm(in)	Ø90/Ø125 (Ø3.5"/Ø4.9")
	Max. Tool Length	mm(in)	400 (15.7")
	Max. Tool Weight	kg(lb)	8 (17.6)
	Tool Selection Method	-	FIXED ADDRESS
TANK CAPACITY	Coolant Tank	ℓ (gal)	600 (158.5)
	Lubricating Tank (Axis/Mill Head)	ℓ (gal)	3/1.8 (0.8/0.5)
POWER SUPPLY	Electric Power Supply	kVA	78
	Thickness of Power Cable	Sq	35
	Voltage	V/Hz	380/400/440 (50/60Hz)
MACHINE	Floor Space(L×W)	mm(in)	4,919×3,478 (193.5"×136.9")
	Height	mm(in)	2,896 (114")
	Weight	kg(lb)	19,500 (42,990)
CNC	Controller	-	SIEMENS 840D

Specifications are subject to change without notice for improvement.

# CONTROLLER

## SIEMENS 840D sl

Control Function	
Max. configuration of axis	Max. 9 axes (Max. 31 Axes)
Max. configuration of axis and sp.	Max. 5 axes (Max. 31 Axes)
Least Command/input	0.001mm / 0.0001inch
Feed Function	
Feedrate Override	0 – 120%
Rapid Traverse Override	F1, 25, 50, 100%
Tool Function	
Tool Radius Comp.	
Zero Offset (G54, G55, G56, G57, G58, G59)	6EA (MAX:100EA)
Programmable Zero Offset	
3D Tool Radius Compensation	
Display	
Language	Chinese Simplified, English, French German, Italian, Spanish
CRT/MDI	TFT 15" Color
Screen saver	
Spindle Function	
Spindle Override	50% – 120%
Spindle Orientation	
Spindle Speed Limitation	
Rigid Tapping	
Manual Operation	
Manual Handle/Jog Feed	
Reposition	
Reference Approach	Ref 1, 2 Approach
Spindle Control	Start, Stop, Rev, Jog, Ort.
Auto Operation	
Single Block	
Feed Hold	
Optional Block Skip	
Machine Lock	
Dry Run	
Simulation	
Diagnosis Function	
Alarm Display	
Monitor	
Programming Function	
Part Program Storage Length	10MB(7500M) **Additional CF card (512MB) possible
Program Name	23 digits
Subroutine Call	16Level
Absolute/incremental Command	G90 – G91

Programming Input & Interpolation Function	
Scaling / Rotation	
Inch / Metric Conversion	
Conversational Cycle Program	Shop Turn/Shop Mill
Block Search	
Macro	
Read/Write System Variable	
BackGround Editing	
Miscellaneous Functions	M – Code
Skip	
Program Stop	M00, M01, M02, M30
Lookahead, Jerk Limitation Feed & Forward Control	
Helical interpolation	
COMPCAD, COMPCURB	
Cylindrical interpolation	
Work Coordinate interpolation	
Conversational Program	
Fanuc Program exe.	G291
Machining Package Milling	
Temperature Compensation	
Protection Function	
Emergency Stop	
Soft Limit / Over Travel	Soft Limit
Contour Monitoring	
Program Protection	
Automation Support Fun.	
Actual Speed Display	
Tool Life Management	Time, Parts
Work Count	Internal
DATA Transfer	
RS 232C I/F / Ethernet	
USB Memory Stick	
Option	
Display	TFT 19" Color
Data transfer	PCU50 With Harddisk (6GB)
EG Machining (Hobbing)	
Balance Cutting	
Extention Language	Chinese Traditional, Czech, Danish, Dutch, Finnish, Hungarian, Japanese, Korean, Polish, Russian, Swedish, Portuguese, Turkish

Figures in inch are converted from metric values.

The SIEMENS controller specifications are subject to change based on the policy of company CNC supplying.



# GLOBAL NETWORK



## HEADQUARTER

### Changwon Technical Center/R&D Center/Factory

153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea  
(Zip Code : 51533) TEL : +82 55 280 9114 FAX : +82 55 282 9680

### Uiwang Technical Center/R&D Center

37, Cheoldobangmulgwan-ro, Uiwang-si, Gyeonggi-do, Korea  
(Zip Code : 16082) TEL : +82 31 596 8209 Fax : +82 55 210 9804

## OVERSEAS OFFICES

### EUROPE

#### HYUNDAI WIA Machine Tools Europe / Europe R&D Center

Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany  
TEL : +49-0-6142-9256-0

#### HYUNDAI WIA Russia

Russia, 197374, St. Petersburg, Torfyanaya doroga 7,  
Business center <Gulliver-2>, Office No. 825

### ASIA

#### Beijing HYUNDAI WIA

No.9, West of Shunxi South Road, Renhe Town, Shunyi District, Beijing, China  
TEL : +86-10-6049-6373

#### Beijing Branch Office

1401, Zhonghangji Plaza B, No. 15 Ronghua South Road, BDA Dist, Daxing Dist,  
Beijing, China, 100176  
TEL : +86-10-8453-9850

#### Shandong HYUNDAI WIA

Company No.188 Shanghai Road, Rizhao City, Shandong Province, China  
TEL : +86-633-229-9021

#### Chengdu Branch Office

No.508 Room, B Block, AFC Plaza, No.88 Jiaozui Road, High-tech Zone, Chengdu,  
China  
TEL : +86-28-8666-4470

#### Jiangsu HYUNDAI WIA

Company No.6 Fenghuang Road, Fenghuang Town, Zhangjiagang City, Jiangsu  
Province, China  
TEL : +86-512-5842-2500

#### Qingdao Branch Office

Room 1207, Caifu Building, 182-6 Haier Middle Road, Qingdao, China  
TEL : +86-532-8667-9334

#### HYUNDAI WIA Machine Tools China

1-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China  
TEL : +86-21-6427-9885

#### India Branch Office

#4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai  
- 600096, Tamilnadu, India  
TEL : +91-76-0490-1618

#### HYUNDAI WIA India

48, Sur.No78-80, Kandamangalam Village, Sengadu Post, Sriperumbudur Taluk,  
Kancheepuram, Tamil Nadu-602 105, India  
TEL : +91-44-2715-9302

#### Vietnam Branch Office

Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway  
13, Thuan Giao, Thuan An, Binh Duong, Vietnam  
TEL : +84-3-5399-5099

### AMERICA

#### HYUNDAI WIA Machine Tools America

450 Commerce Blvd, Carlstadt, NJ 07072, USA  
TEL : +1-201-987-7298

#### HYUNDAI WIA America R&D Center

39205 Country Club Drive Suite C-9, Farmington Hills, MI 48331, USA  
TEL : +1-248-324-1057

#### HYUNDAI WIA Mexico

Carretera a Pesquería-Los Ramones KMS 13 al 15 Interior 18 Localidad "La Arena"  
Pesquería C.P.66679, Nuevo León México  
TEL : +52-1-81-1646-5208



## **EXPERIENCE THE NEW TECHNOLOGY**

HYUNDAI WIA Machine Tools, Leading the Innovation in Global Manufacturing with a Perfect Quality



<http://machine.hyundai-wia.com>

HYUNDAI WIA Machine Tools  
Global Links