


QAN 260U

Betriebsart	Drehzahl n	Leistung P	Drehmoment M	Strom I
S1	1500 min ⁻¹	24,0 kW	152,8 Nm	58,0 A
	7400 min ⁻¹	24,0 kW	31,0 Nm	–
	10000 min ⁻¹	18,0 kW	17,2 Nm	–
S6-60%	1500 min ⁻¹	30,0 kW	191,0 Nm	67,2 A
	7000 min ⁻¹	30,0 kW	40,9 Nm	–
	10000 min ⁻¹	22,5 kW	21,5 Nm	–
S6-40%	1500 min ⁻¹	38,0 kW	241,9 Nm	81,8 A
	5500 min ⁻¹	38,0 kW	66,0 Nm	–
	10000 min ⁻¹	26,0 kW	24,8 Nm	–
S6-25%	1500 min ⁻¹	48,0 kW	305,6 Nm	100,6 A
	4500 min ⁻¹	48,0 kW	101,9 Nm	–
	7000 min ⁻¹	41,0 kW	55,9 Nm	–

Leistungs-Kennlinie

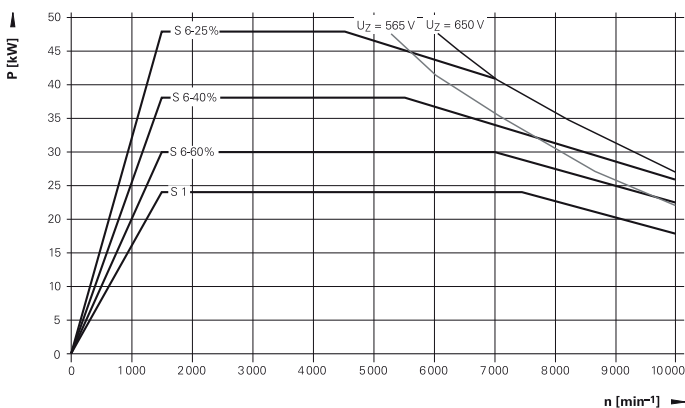

Momenten-Kennlinie

